

Category		Title
NFR	1.A.3.d.i(i), 1.A.3.d.i(ii), 1.A.3.d.ii, 1.A.4.c.iii, 1.A.5.b	International maritime navigation, international inland navigation, national navigation (shipping), national fishing, military (shipping), and recreational boats
SNAP	080402 080403 080404 080304	National sea traffic within EMEP area National fishing International sea traffic (international bunkers) Inland goods carrying vessels
ISIC		
Version	Guidebook 2019	
Last update	December 2021	

Lead authors

Riccardo De Lauretis, Leonidas Ntziachristos, Carlo Trozzi

Contributing authors (including to earlier versions of this chapter)

Jean-Pierre Fontelle, Erik Fridell, Achilleas Grigoriadis, Nikolas Hill, Niels Kilde, Kevin Lavender, Sokratis Mamarikas, Gillian Reynolds, Kristin Rypdal, Roel Thomas, Anthony Webster, Morten Winther

Contents

1 Overview	3
2. Description of sources	4
2.1 Process description	4
2.2 Techniques	7
2.3 Emissions	8
2.4 Controls.....	8
3. Methods	14
3.1 Choice of method	14
3.2 Tier 1 default approach.....	15
3.3 Tier 2 technology specific approach	19
3.4 Tier 3 Ship movement methodology	24
Effect of control techniques on emissions.....	35
3.5 Species profile	37
3.6 Military shipping activities	38
4. Data quality	39
4.1 Completeness.....	39
4.2 Verification.....	39
4.3 Developing a consistent time series and recalculation.....	40
4.4 Gridding	41
4.5 Reporting and documentation.....	41
5. References.....	42
6. Point of enquiry.....	44
Appendix A: Black carbon (BC) fractions of PM emissions from navigation	45
Appendix B: Default fuels and their properties	46
Appendix C: Calculation methodology for PM	47

1 Overview

This source category covers all water-borne transport from recreational craft to large ocean-going cargo ships that are driven primarily by high-, slow- and medium-speed diesel engines and occasionally by steam or gas turbines. It includes hovercraft and hydrofoils. Water-borne navigation causes emissions of carbon dioxide (CO₂), methane (CH₄) and nitrous oxide (N₂O), as well as carbon monoxide (CO), non-methane volatile organic compounds (NMVOCs), sulphur dioxide (SO₂), particulate matter (PM) and oxides of nitrogen (NO_x). The activities included in this chapter are outlined in Table 0-1 (IPCC, 2006).

Table 0-1 Source category structure referring to NFR nomenclature

Source category	Coverage
1.A.3.d Water-borne navigation	Emissions from fuels used to propel water-borne vessels, including hovercraft and hydrofoils, but excluding fishing vessels. The international/domestic split should be determined on the basis of port of departure and port of arrival, and not by the flag or nationality of the ship.
1.A.3.d.i International water-borne navigation (International bunkers)	Emissions from fuels used by vessels of all flags that are engaged in international water-borne navigation. The international navigation may take place at sea, on inland lakes and waterways and in coastal waters. Includes emissions from journeys that depart in one country and arrive in a different country. Excludes consumption by fishing vessels (see 1.A.4.c.iii - Fishing). Emissions from international military water-borne navigation can be included as a separate sub-category of international water-borne navigation provided that the same definitional distinction is applied and data are available to support the definition.
1.A.3.d.ii Domestic water-borne navigation	Emissions from fuels used by vessels of all flags that depart and arrive in the same country (excludes fishing, which should be reported under 1.A.4.c.iii, and military, which should be reported under 1.A.5.b). Includes small leisure boats. Note that this may include journeys of considerable length between two ports in a country (e.g. San Francisco to Honolulu).
1.A.4.c.iii Fishing (mobile combustion)	Emissions from fuels combusted for inland, coastal and deep-sea fishing. Fishing should cover vessels of all flags that have refuelled in the country (include international fishing).
1.A.5.b Mobile (water-borne navigation component)	All remaining water-borne mobile emissions from fuel combustion that are not specified elsewhere. Includes military water-borne navigation emissions from fuel delivered to the country's military not otherwise included separately in 1.A.3.d.i, as well as fuel delivered within that country but used by the military of external countries that are not engaged in multilateral operations.
Multi-lateral operations (water-borne navigation component)	Emissions from fuels used for water-borne navigation in multilateral operations pursuant to the Charter of the United Nations. Include emissions from fuel delivered to the military in the country and delivered to the military of other countries.

The importance of this sector ranges from negligible for land-locked countries with no major inland waterways to very significant for some pollutants contribution for many countries. For this latter group, the contribution of emissions from navigation (originating from the combustion of fuel to provide motion or auxiliary power onboard vessels) is sizeable for SO₂, NO_x, CO₂ and CO and of lesser, but still significance importance, for NMVOCs and some metals.

2. Description of sources


2.1 Process description

Exhaust emissions from navigation arise from:

- engines used as main propulsion engines;
- auxiliary engines used to provide power and services within vessels.

The different types of engines used are discussed in subsection 2.2.

Figure 0-1 Flow diagram for the contribution from navigation to mobile sources combustion emissions

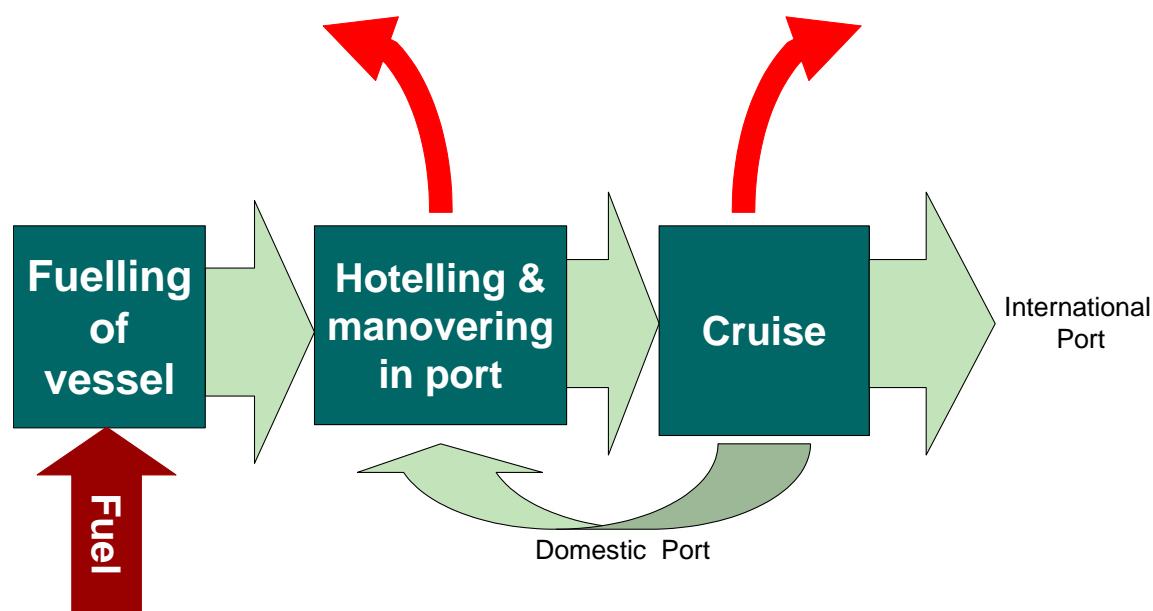

Vessels berth and remain tied up (hotelling) while they unload and load, or whilst they await their next voyage. They then cast off and manoeuvre away from their mooring point before sailing away from the port. Following departure from the despatching port the vessel cruises to its destination, which may be a port in the same country (a domestic voyage, activity within NFR code 1.A.3.d.ii) or in a different country (an international voyage, activity within NFR code 1.A.3.d.i). This simplistic pattern may be complicated by other stopping patterns. The recommended criteria for distinguishing between domestic and international navigation are summarised in Table 0-1. In summary it depends only on the origin and destination of ship for each segment of its voyaging.

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

Table 0-1 Criteria for defining international or domestic navigation (applies to each segment of a voyage calling at more than two ports)*

Journey type between two ports	Domestic	International
Departs and arrives in same country	Yes	No
Departs from one country and arrives in another	No	Yes

Most shipping movement data are collected on the basis of individual trip segments (from one departure to the next arrival) and do not distinguish between different types of intermediate stops (consistent with the IPCC Good Practice Guidance). Basing the distinction on individual segment data is simpler than looking the complete trip and is likely to reduce uncertainties. It is considered very unlikely that this would make any significant impact to the total emission estimates. This does not change the way that emissions from international journeys are reported under the UNECE LRTAP Convention (i.e. as an additional 'memo-item' that is not included in national totals).

It is important to note that this table relates to all water-borne vessels, whether they operate on the sea, on rivers or lakes. In order to meet the criteria given in Table 0-1, it is necessary to make detailed bottom-up fuel consumption and emission calculations for the individual segments (Tier 3). In order to obtain the most precise estimates for navigation, parties are encouraged to carry out such bottom-up calculations. It is however necessary to meet the general reporting criteria for the party as a whole, and hence if Tier 3 fuel consumption estimates are obtained, parties must subsequently make fuel adjustments in other relevant fuel consuming sectors in order to maintain the grand national energy balance (see e.g. Winther 2008a, Winther 2008b).

The detailed Tier 3 approach, however, requires statistical data which may not be available by the reporting party. The approach therefore can be based on fuel sales reported in national statistics according to the statistical categories: fisheries, national sea traffic and international sea traffic:

National fishing (fisheries): emissions from all national fishing according to fuel sold in the country. By definition, all fuel sold for commercial fishing activities in the reporting party is considered domestic. There is no international bunker fuel category for commercial fishing, regardless of where the fishing occurs.

International sea traffic: emissions from bunker fuel sold for international sea traffic in the country of the reporting party. The emissions are to be reported to both UNFCCC and UNECE for information only.

International inland shipping: emissions from bunker fuel sold for international inland shipping in the country of the reporting party. The emissions are to be reported to UNECE within national totals and to UNFCCC for information only.

Further guidance

In general, the distinction between domestic and international emissions on the basis of the criteria in Table 0-1 should be clear. However, it may be useful to provide some further guidance:

Long distance territories

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

When part of the territory of a country is at long distance (e.g. for France) and there is no intermediate stop in other countries, the journey is always domestic. For UNFCCC, the allocation is always domestic and included in the national total. Previously for UNECE, only the part of emissions within the European Monitoring and Evaluation Programme (EMEP) area was considered, so that when the location of the overseas territory was outside the EMEP area, a specific allocation rule was necessary. Since the 2002 EMEP Reporting Guidelines there was no longer a reference to the EMEP area with respect to what is included, in order to harmonise with UNFCCC so that the same fuel estimate could be used in both cases. The exception is for parties that have footnotes in their protocols excluding certain areas, in which case the situation is different.

Lack of availability of statistical data

When the necessary statistical data are not available, the reporting party should describe clearly in its National Inventory Report the approach adopted. One possible option would be as follows:

For UNECE as well as UNFCCC, the distinction between domestic and international can be approximated by fuel sales. However, a country is encouraged to verify the definition of bunkers used for this fuel allocation in national statistics (checking that it is similar to the one used for emissions, as it will never be exactly the same). When shipping is a key source, a country should also verify the sales data by performing the ship movement methodology; however this may prove too much to perform on an annual basis.

NB: For UNFCCC, all bunker fuel and related GHG emissions are therefore often considered as 'international' (sea ships as well as inland ships).

National grids and 'international emissions'

The distinction domestic/international is relevant to assess the (future) compliance of a country to its protocol requirements. When reporting, the parties are requested to report their national shipping emissions by grid cell. When emission data are used for modelling purposes by EMEP, it is necessary to also take into account the 'international' emissions. International emissions are only reported as memo items, and thus shall not be gridded by the Member States. EMEP thus does not request international maritime emission data by grid cell. For EMEP, the location of maritime emissions is carried out separately including international and transit traffic (prepared by the Lloyds Register). However, Lloyds does not cover the Mediterranean, the Baltic and inland waters, therefore gridding of the emissions from these areas will require a centrally-organised special investigation by EMEP.

Harbour emissions

UNECE and EMEP do not require the distinction between emissions in harbours and emissions during cruise. Such information can, however, be relevant for other applications, for example local inventories and for air quality modelling purposes. To determine the location of emissions from seagoing ships it is possible to apply the Tier 3 approach, where several phases in shipping are distinguished (outlined in subsection 0).

2.2 Techniques

Marine diesel engines are the predominant form of power unit within the marine industry for both propulsion and auxiliary power generation. In 2010 an analysis of about 100 000 vessels indicated marine diesels powered around 99 % of the world's fleet, with steam turbines powering less than 1 %. The only other type of engine highlighted was gas turbines, used virtually only on passenger vessels, and only used in around 0.1 % of vessels (Trozzi, 2010). Diesel engines can be categorised into slow (around 18% of engines), medium (around 55%), or fast (around 27%), depending on their rated speed.

Emissions are dependent on the type of engine, and therefore these will be reviewed briefly.

Slow speed diesel engines: these have a maximum operating speed of up to 300 rev/min, although most operate at speeds between 80–140 rev/min. They usually operate on a two-stroke cycle, and are cross head engines of 4–12 cylinders. Some current designs are capable of developing in excess of 4 000 kW/cylinder and with brake mean effective pressures of the order of 1.7 MPa. Within the marine industry such engines are exclusively used for main propulsion purposes and comprise the greater proportion of installed power, and hence fuel consumption, within the industry.

Medium speed diesel engines: this term is used to describe marine diesel engines with a maximum operating speed in the range 300–900 rev/min. They generally operate on the four-stroke cycle, are normally trunk piston engines of up to 12 cylinders in line, or 20 cylinders in 'V' formation. Current designs develop power output in the range 100–2000 kW/cylinder and with brake mean effective pressures in the range 1.0–2.5 MPa. Engines of this type may be used for both main propulsion and auxiliary purposes in the marine industry. For propulsion purposes such engines may be used in multi-engine installations and will normally be coupled to the propeller via a gearbox. Engines of this type will also be used in diesel-electric installations.

High speed diesel engines: this title is used to describe marine diesel engines with a maximum operating speed greater than 900 rev/min. They are essentially smaller versions of the medium speed diesel engines or larger versions of road truck vehicle engines; they are used on smaller vessels and are often the source of auxiliary power on board vessels.

Steam turbines: whilst these replaced reciprocating steam engines in the early twentieth century they, themselves, have been replaced by the more efficient diesel engines which are cheaper to run. It is notable that the steam turbine vessels are predominantly fuelled with fuel oil rather than lighter fuels.

Gas turbines: whilst this type of engine is more widely used in warships, they are currently installed in only a very small proportion of the merchant fleet, often in conjunction with diesel engines.

In addition to the categorisation into five types of engines, the marine engines can be further stratified according to their principal fuel: bunker fuel oil (BFO), marine diesel oil (MDO) or marine gas oil (MGO) and Liquefied Natural Gas (LNG). As is discussed later, some emissions (e.g. of SO_x and heavy metals) are predominantly fuel based rather than dependent on engine type. Consequently, a knowledge of the fuel used significantly influences emissions in addition to the engine type using it.

2.3 Emissions

The emissions produced by navigation are a consequence of combusting the fuel in an internal combustion (marine) engine. Consequently, the principal pollutants are those from internal combustion engines. These are CO, VOC, NO_x and PM (including BC¹) derived from soot which mainly have to do with engine technology, and CO₂, SO_x, heavy metals and further PM (mainly sulphate-derived) which originate from the fuel speciation.

On a European scale, SO₂ and NO_x emissions from national shipping can be important with respect to total national emissions (Table 0-2).

Table 0-2 Ranges of contribution of national shipping to total emissions

Pollutant	Contribution to total emissions [%]
SO _x	0-80
NO _x	0-30
NMVOG	0-5
CO	0-18
NH ₃	-
PM ₁₀ *	0-4

Note

* = values from EMEP (https://www.ceip.at/ms/ceip_home1/ceip_home/webdab_emepdatabase/)

which correspond to official emissions for 2004, from country submissions in 2006.

0 = emissions are reported, but the exact value is below the rounding limit (0.1 per cent)

- = no emissions reported

2.4 Controls

Pollutant emissions can be controlled by two mechanisms: control of the combustion technology, combined with exhaust gas treatment, and control of the fuel quality. Both these measures are used.

On the 22 July 2005 the International Marine Organisation's (IMO's) Marine Environment Protection Committee adopted guidelines on exhaust gas cleaning, CO₂ indexing, and minor amendments to Marpol (short for 'marine pollution', International Convention for the Prevention of Pollution from Ships) Annex VI. The principal legislative instrument Marpol Annex VI controls:

- NO_x limits [Regulation 13];
- ozone depleting substances [Regulation 12];
- sulphur oxides, through sulphur in fuel [Regulation 14];
- sulphur oxides further through the designation of Sulphur Dioxide Emission Control Area (SECA), [Regulation 14];
- volatile organic compounds from tankers [Regulation 15].

The measures in Marpol Annex VI describe the outcomes; they do not stipulate how they are to be achieved. Technology for controlling emissions includes:

¹ For the purposes of this guidance, BC emission factors are assumed to equal those for elemental carbon (EC). For further information please refer to Chapter 1.A.1 Energy Industries and Appendix A of this chapter.

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

- improved engine design, fuel injection systems, electronic timing, etc. to obtain optimum efficiency (optimising CO₂ emissions) reducing PM and VOC emissions;
- exhaust gas recirculation (EGR) where a portion of the exhaust gas is routed back to the engine charge air whereby the physical properties of the charge air are changed. For marine diesel engines, a typical NO_x emission reduction of 10–30 % can be found. This technique has not yet been in regular service for ships;
- selective catalytic reduction (SCR) where a reducing agent is introduced to the exhaust gas across a catalyst. Hereby NO_x is reduced to N₂ and H₂O. However this technology imposes severe constraints on the ship design and operation to be efficient. A reduction of 70–95 % in NO_x can be expected applying this technology. The technology is in use in a few ships and is still being developed;
- selective non catalytic reduction (SNCR) where the exhaust gas is treated as for the SCR exhaust gas treatment technique, except the catalyst is omitted. The process employs a reducing agent, supplied to the exhaust gas at a prescribed rate and temperature upstream of a reduction chamber. Installation is simpler than the SCR, but needs a very high temperature to be efficient. Reductions of 75–95 % can be expected. However, no installations have been applied yet on ships;

sea water scrubbing. Sea water scrubbing involves removal of SO₂ by sea water scrubbing (Concawe, 1994) and reduction of particulate matters. It allows operation on regular HSFO (high sulphur fuel oil), although it increases 2-3% of the fuel total consumption, but also on low or zero sulphur fuels, such as natural gas or biofuels.

In more detail, the most common emission control technologies are described below:

2.4.1 Scrubber (Exhaust Gas Cleaning System)

The Scrubber (Exhaust Gas Cleaning System) is an aftertreatment device that is installed in ships in order mainly to reduce SO_x emissions and secondly PM. They actually clean SO_x and PM by adding seawater or fresh water with added chemical substances or dry substances in the exhaust gas. The output of the cleaning process results in formation of a waste flow containing the added substance in addition with the removed emissions. The cleaned from the treated substances exhaust gas is released in the atmosphere while the waste flow is either discharged in sea or stored in a ship tank (Tran, 2017).

Scrubbers according to their operation principle are divided in two main categories:

- Dry Scrubbers
- Wet Scrubbers

2.4.1.1 Dry Scrubbers

Dry scrubbers, instead of using liquid substances to treat the exhaust gas, operate with the hydrated lime-treated granulates that reacts with SO₂ and create as a final product, pellets of gypsum, which are stored on board and can be disposed on a port facility (Tran, 2017).

2.4.1.2 Wet Scrubbers

Wet scrubbers are using liquid mean to abate the exhaust gas and can be divided in the below subcategories:

- Open-loop
- Closed-loop
- Hybrid

2.4.1.2.1 Open-loop Scrubbers

Open-loop scrubbers use the seawater alkalinity to wash the exhaust gas and remove SO₂ and part of particles that are absorbed in the water droplets. The contaminated wash water is then discharged to sea, while the emitted exhaust gas in the atmosphere includes significantly lower SO₂ quantities. The required water flow in the scrubber can be approximately 45 m³/MWh (Emerge 2020).

2.4.1.2.2 Closed loop Scrubbers

The operational principle of the closed-loop scrubbers is similar to the open-loop, with the only difference that the medium used for the scrubbing process is fresh water with added amounts of alkaline chemical substance, most often sodium hydroxide. The waste stream created is stored in a ship tank. The required water flow is approximately 0.2 m³/MWh (Emerge 2020).

2.4.1.2.3 Hybrid Scrubbers

Hybrid scrubbers can be operated either as open-loop or closed-loop, combining the advantages of each method. While operating as open-loop scrubber, seawater is used as a cleaning medium and thus reduce the overall cost of purchasing the alkaline chemical substance. On the other hand, when vessel is moored in the port, closed-loop is in operation and thus reducing the cost of lower sulphur fuel purchase.

2.4.2 SCR

SCR is a device for NO_x reduction in favor of producing N₂, by inserting urea on a SCR catalyst. The main catalyst material on marine application is a metal oxide of vanadium that is combined with a titanium oxide in a metallic or ceramic structure. Moreover, ammonia that is formed from urea works as a reducing agent by reacting with NO and NO₂.

In some cases, an ammonia slip catalyst is also applied through which ammonia is oxidized, avoiding the escape to the atmosphere.

SCR device can work with all fuel types in all marine engines. In addition, SCR efficiency is increased at high temperatures and catalytic activity stops below a lower temperature limit which works as an operational threshold (Emerge 2020).

2.4.3 DOC

Diesel Oxidation Catalyst (DOC) acts as an oxidation aftertreatment device for CO and HCs, as well as the organic fraction of PM. DOC is structured in honey combed narrow channels where catalyst coat is applied in the walls. Oxidation process begins when CO, HC and OC particles come in contact with the catalyst coated walls. High sulphur fuels are not usually recommended while DOC is in operation. Furthermore, DOC promotes the further oxidation of SO₂ to sulphates that adds particulate mass to the total PM (Emerge 2020).

2.4.4 DPF

Diesel particle filters (DPF) come in different designs and remove particulate matter from the exhaust stream with varying efficiencies. Simple designs can be a filter element made up of winding channels in a relatively open structure. These filters are sometimes referred to as partial filters or flow through filters. Particles collide with, and stick to, the surfaces of the channel walls. With their open structure, these filters are less prone to plugging than wall flow filters that are often used for a more efficient particle abatement. Straining and inertial impaction, and to some extent interception, are the main removal mechanisms in these filter types that mainly removes larger particles in the exhaust stream. A DPF filter will need to burn off the soot and particle build up on the filter, often referred to as filter regeneration (Emerge 2020). DPFs that are installed in marine engines present a difficulty in soot removal or regeneration, due to high sulphur content that is mainly contained in marine fuels (Kuwahara et al. 2012).

2.4.5 Combination of abatement technologies

Aftertreatment technologies can be combined in order to abate more pollutants. Specifically, SCR and Scrubber could be installed on vessel for NO_x and SO_x, and indirectly PM emission reduction. From a technical perspective, the SCR then needs to be positioned upstream of the scrubber for the exhaust temperature to be high enough which means that the exhaust reaching the SCR would contain high levels of SO₂. It has been demonstrated that SCR can be operated in such conditions provided that the temperature is high enough. It is from a technical perspective advantageous if low-sulphur fuel is used (Emerge 2020). In addition, different combinations of technologies have been used on vessels and have been reported in the literature.

Moreover, EU directives exist which relate to the content of sulphur in marine gas oil (EU-Directive 93/12 and EU-Directive 1999/32) and the content of sulphur in heavy fuel oil used in SECA (EU-Directive 2005/33).

The Marine Environment Protection Committee (MEPC) of IMO has approved amendments to Marpol Annex VI in October 2008 in order to strengthen the emission standards for NO_x and the sulphur contents of heavy fuel oil used by ship engines.

The current Marpol 73/78 Annex VI legislation on NO_x emissions, formulated by IMO (International Maritime Organisation) is relevant for diesel engines with a power output higher than 130 kW, which are installed on a ship constructed on or after 1 January 2000 and diesel engines with a power output higher than 130 kW which undergo major conversion on or after 1 January 2000.

The Marpol Annex VI, as amended by IMO in October 2008, considers a three tiered approach as follows:

- Tier I: diesel engines (> 130 kW) installed on a ship constructed on or after 1 January 2000 and prior to 1 January 2011;
- Tier II: diesel engines (> 130 kW) installed on a ship constructed on or after 1 January 2011;
- Tier III ⁽²⁾: diesel engines (> 130 kW) installed on a ship constructed on or after 1 January 2016.

The Tier I-III NO_x legislation values rely on the rated engine speeds (n) given in RPM (revolutions per minute). The emission limit equations are shown in Table 0-3.

⁽²⁾ For ships operating in a designated Emission Control Area. Outside a designated Emission Control Area, Tier II limits apply.

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

Table 0-3 Tier I-III NO_x emission limits for ship engines (amendments to Marpol Annex VI)

Regulation	NO _x limit	Rated engine speeds (revolutions per minute)
Tier I	17 g/kWh	n < 130
	$45 \times n^{-0.2}$ g/kWh	$130 \leq n < 2000$
	9,8 g/kWh	n ≥ 2000
Tier II	14.4 g/kWh	n < 130
	$44 \times n^{-0.23}$ g/kWh	$130 \leq n < 2000$
	7.7 g/kWh	n ≥ 2000
Tier III	3.4 g/kWh	n < 130
	$9 \times n^{-0.2}$ g/kWh	$130 \leq n < 2000$
	2 g/kWh	n ≥ 2000

Tier I limits are to be applied for existing engines with a power output higher than 5 000 kW and a displacement per cylinder at or above 90 litres, installed on a ship constructed on or after 1 January 1990 but prior to 1 January 2000, provided that an Approved Method for that engine has been certified by an Administration of a Party and notification of such certification has been submitted to the Organization by the certifying Administration.

In relation to the sulphur content in heavy fuel and marine gas oil used by ship engines, Table 0-4 shows the current legislation in force.

Table 0-4 Current legislation in relation to marine fuel quality

Legislation	Region	Heavy fuel oil		Gas oil	
		S-%	Impl. date	S-%	Impl. date
EU-Directive 93/12		None		0.2 ¹	1.10.1994
EU-Directive 1999/32		None		0.2	1.1.2000
EU-Directive 2005/33	SECA — Baltic sea	1.5	11.08.2006	0.1	1.1.2008
	SECA — North sea	1.5	11.08.2007	0.1	1.1.2008
	Outside SECA's	None		0.1	1.1.2008
Marpol Annex VI	SECA — Baltic sea	1.5	19.05.2006		
	SECA — North sea	1.5	21.11.2007		
	Outside SECA	4.5	19.05.2006		
Marpol Annex VI amendments	SECA	1	01.03.2010		
	SECA	0.1	01.01.2015		
	Outside SECA	3.5	01.01.2012		
		0.5	01.01.2020		

Notes

1. Sulphur content limit for fuel sold inside EU.

For recreational craft, Directive 2003/44 comprises the emission legislation limits for diesel engines, and for two-stroke and four-stroke gasoline engines, respectively. The CO and VOC emission limits depend on engine size (kW) and the inserted parameters presented in the calculation formulas in Table 0-5. For NO_x, a constant limit value is given for each of the three engine types. For TSP, the constant emission limit regards diesel engines only.

International maritime and inland navigation, national navigation,
 national fishing, recreational boats International maritime
 navigation, international inland navigation, national navigation
 (shipping), national fishing

Table 0-5 Overview of the EU Emission Directive 2003/44 for recreational craft


Engine type	Impl. date	CO=A+B/P ⁿ			VOC=A+B/P ⁿ			NO _x	TSP
		A	B	n	A	B	n		
2-stroke gasoline	1/1 2007	150.0	600.0	1.0	30.0	100.0	0.75	10.0	-
4-stroke gasoline	1/1 2006	150.0	600.0	1.0	6.0	50.0	0.75	15.0	-
Diesel	1/1 2006	5.0	0.0	0	1.5	2.0	0.5	9.8	1.0

3. Methods

3.1 Choice of method

In Figure 0-1 a procedure is presented to select the methods for estimating the emissions from navigation. Emission estimates will need to be separated by NFR code for reporting.

Figure 0-1 Decision tree for emissions from shipping activities

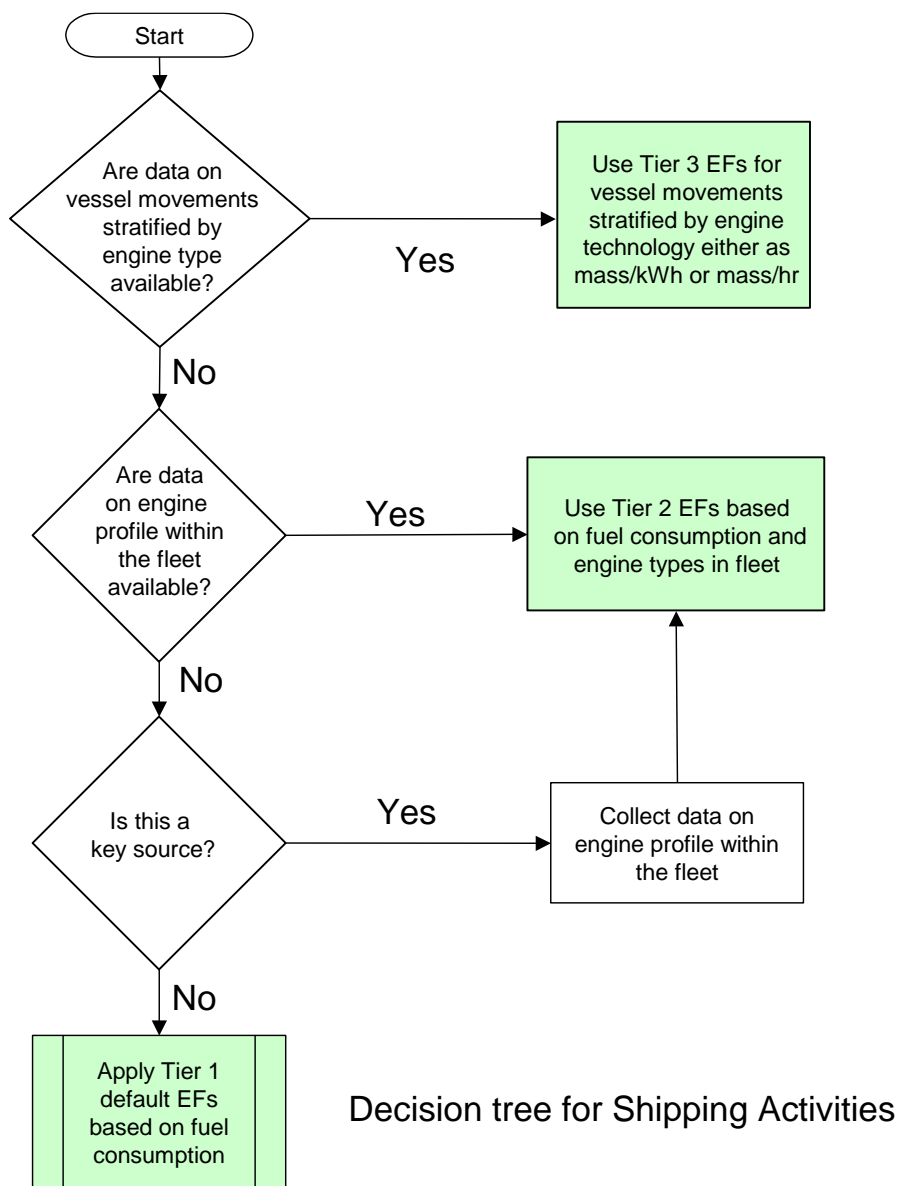

This decision tree is applicable to all parties. Its basic concepts are:

- if detailed information is available then use it as much as possible;
- if this source category is a key source, then a Tier 2 or Tier 3 method must be used for estimating the emissions.

In all cases emissions need to be split by national navigation, international navigation, fishing and military which are usually determined by the available statistics.

3.2 Tier 1 default approach

3.2.1 Algorithm

The Tier 1 approach for navigation uses the general equation to be applied for the different NFR codes:

$$E_i = \sum_m (FC_m \times EF_{i,m})$$

where:

E_i = emission of pollutant i in kilograms;

FC_m = mass of fuel type m sold in the country for navigation (tonnes);

$EF_{i,m}$ = fuel consumption-specific emission factor of pollutant i and fuel type m [kg/tonne];

m = fuel type (bunker fuel oil, marine diesel oil, marine gas oil, LNG, gasoline).

The $FC_m \times EF$ product is summed over the five types of fuel used to provide total emissions from navigation. This approach incorporates the relationship between fuel composition and some emissions (notably SO₂ and heavy metals).

Tier 1 emission factors ($EF_{i,m}$) assume an average technology for the fleet.

3.2.2 Default emission factors

The Tier 1 approach uses emission factors for each pollutant for each type of fuel used. Some factors (e.g. SO₂) depend on the fuel quality, which may change from batch to batch, and from year to year, and consequently these emission factors include a 'Sulphur content of fuel' factor. Table 0-1, Table 0-2, Table and Table 3-4 provide emission factors for ships using bunker fuel oil, marine diesel oil/marine gas oil (MDO/MGO), LNG and gasoline, respectively. In Tier 1 EFs are aggregated, indicative of an average trip and average type of ship engine.

3.2.3 Activity data

The Tier 1 approach is based on the premise that the quantities of fuel sold for shipping activities are available by fuel type, from nationally collected data. Fuel data needs to be split by NFR code:

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

national navigation (usually navigation statistics), international (bunkers), fishing (usually available as separate statistics) and military.

Table 0-1 Tier 1 emission factors for ships using bunker fuel oil

Tier 1 default emission factors					
	Code	Name			
NFR Source Category	1.A.3.d.i	International navigation			
	1.A.3.d.ii	National navigation			
	1.A.4.c.iii	Agriculture / forestry / fishing: National fishing			
	1.A.5.b	Other, mobile (including military, land based and recreational boats)			
Fuel	Bunker Fuel Oil				
Not applicable					
Not estimated	NH ₃ , Benzo(a)pyrene, Benzo(b)fluoranthene, Benzo(k)fluoranthene, Indeno(1,2,3-cd)pyrene				
Pollutant	Value	Unit	95% confidence interval		Reference
			Lower	Upper	
NO _x	69.1	kg/tonne fuel	0	0	Scipper (2021)
CO	3.67	kg/tonne fuel	0	0	Scipper (2021)
NMVOC	1.67	kg/tonne fuel	0	0	Scipper (2021)
SO ₂	19.2	kg/tonne fuel	0	0	Scipper (2021) See also note (1)
PM ₁₀	5.2	kg/tonne fuel	0	0	Scipper (2021)
BC	0.0903	kg/tonne fuel	0	0	Scipper (2021)
Pb	0.18	g/tonne fuel	0	0	average value
Cd	0.02	g/tonne fuel	0	0	average value
Hg	0.02	g/tonne fuel	0	0	average value
As	0.68	g/tonne fuel	0	0	average value
Cr	0.72	g/tonne fuel	0	0	average value
Cu	1.25	g/tonne fuel	0	0	average value
Ni	32	g/tonne fuel	0	0	average value
Se	0.21	g/tonne fuel	0	0	average value
Zn	1.2	g/tonne fuel	0	0	average value
PCB	0.57	mg/tonne fuel	0	0	Cooper (2005)
PCDD/F	0.47	ug I-TEQ /tonne fuel	0	0	Cooper (2005)
HCB	0.14	mg/tonne fuel	0	0	Cooper (2005)

Notes

1. In case where fuel sulphur content is known, SO_x can be calculated by using equation 20 * S. Source: Lloyd's Register (1995)
2. NO_x emission factor has been estimated by applying weighting factors per NO_x Tier regulation standards. These weights correspond to the estimated penetration of each NO_x Tier standard to the total fleet, according to vessel finder database, where a sample of 526800 vessels exist.
3. Reference: 'average value' is between Lloyd's Register (1995) and Cooper and Gustafsson (2004).
4. For further information regarding default fuels used and their properties see Appendix B.

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

Table 0-2 Tier 1 emission factors for ships using marine diesel oil/marine gas oil

Tier 1 emission factor					
	Code	Name			
NFR Source Category	1.A.3.d.i 1.A.3.d.ii 1.A.4.c.iii 1.A.5.b	International navigation National navigation Agriculture / forestry / fishing: National fishing Other, mobile (including military, land based and recreational boats)			
Fuel	Marine diesel oil/marine gas oil (MDO/MGO)				
Not applicable	HCH				
Not estimated	NH ₃ , Benzo(a)pyrene, Benzo(b)fluoranthene, Benzo(k)fluoranthene, Indeno(1,2,3-cd)pyrene				
Pollutant	Value	Unit	95% confidence interval		Reference
			Lower	Upper	
NO _x	72.2	kg/tonne fuel	0	0	Scipper (2021)
CO	3.84	kg/tonne fuel	0	0	Scipper (2021)
NMVOC	1.75	kg/tonne fuel	0	0	Scipper (2021)
SO ₂	1.82	kg/tonne fuel	0	0	Scipper (2021) See also note (1)
PM ₁₀	1.07	kg/tonne fuel	0	0	Scipper (2021)
BC	0.0483	kg/tonne fuel	0	0	Scipper (2021)
Pb	0.13	g/tonne fuel	0	0	average value
Cd	0.01	g/tonne fuel	0	0	average value
Hg	0.03	g/tonne fuel	0	0	average value
As	0.04	g/tonne fuel	0	0	average value
Cr	0.05	g/tonne fuel	0	0	average value
Cu	0.88	g/tonne fuel	0	0	average value
Ni	1	g/tonne fuel	0	0	average value
Se	0.1	g/tonne fuel	0	0	average value
Zn	1.2	g/tonne fuel	0	0	average value
PCB	0.038	mg/tonne fuel	0	0	Cooper (2005)
PCDD/F	0.13	ug I-TEQ/tonne	0	0	Cooper (2005)
HCB	0.08	mg/tonne fuel	0	0	Cooper (2005)

Notes

1. In case where fuel sulphur content is known, SO_x can be calculated by using equation 20 * S. Source: Lloyd's Register (1995)
2. NO_x emission factor has been estimated by applying weighting factors per NO_x Tier regulation standards. These weights correspond to the estimated penetration of each NO_x Tier standard to the total fleet, according to vessel finder database, where a sample of 526800 vessels exist.
3. Reference: 'average value' is between Lloyd's Register (1995) and Cooper and Gustafsson (2004)
4. For further information regarding default fuels used and their properties see Appendix B.

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

Table 0-3 Tier 1 emission factors for ships using LNG

Tier 1 emission factor					
	Code	Name			
NFR Source Category	1.A.3.d.i 1.A.3.d.ii 1.A.4.c.iii 1.A.5.b	International navigation National navigation Agriculture / forestry / fishing: National fishing Other, mobile (including military, land based and recreational boats)			
Fuel	LNG				
Not applicable					
Not estimated	NH ₃				
Pollutant	Value	Unit	95% confidence interval		Reference
			Lower	Upper	
NO _x	4.92	kg/tonne fuel	0	0	Scipper (2021)
CO	13.8	kg/tonne fuel	0	0	Scipper (2021)
NMVOC	2.00	kg/tonne fuel	0	0	Scipper (2021)
SO ₂	0.00	kg/tonne fuel	0	0	Scipper (2021) See also note (2)
TSP	1.24 E-03	kg/tonne fuel	0	0	Scipper (2021)
PM ₁₀	1.24 E-03	kg/tonne fuel	0	0	Scipper (2021)
PM _{2.5}	1.06 E-03	kg/tonne fuel	0	0	Scipper (2021)
BC	2.49 E-05	kg/tonne fuel	0	0	Scipper (2021)

Notes

1. S = percentage sulphur content in LNG is extremely low. A small quantity of sulphur may exist derived from the pilot fuel used for combustion of LNG and lubricating oil.
2. In case where fuel sulphur content is known, SO_x can be calculated by using equation $20 * S$. Source: Lloyd's Register (1995)
3. NO_x emission factor has been estimated by applying weighting factors per NO_x Tier regulation standards. These weights correspond to the estimated penetration of each NO_x Tier standard to the total fleet, according to vessel finder database, where a sample of 526800 vessels exist.
4. For further information regarding default fuels used and their properties see Appendix B.

Table 3-4 Tier 1 emission factors for ships using gasoline

Tier 1 emission factor					
	Code	Name			
NFR Source Category	1.A.3.d.ii	National navigation			
Fuel	Gasoline				
Not applicable	HCH, PCB, HCB				
Not estimated	NH ₃ , Pb, Cd, Hg, As, Cr, Cu, Ni, Se, Zn, PCDD/F, Benzo(a)pyrene, Benzo(b)fluoranthene, Benzo(k)fluoranthene, Indeno(1,2,3-cd)pyrene				
Pollutant	Value	Unit	95% confidence interval		Reference
			Lower	Upper	
NO _x	9.4	kg/tonne fuel	0	0	Winther & Nielsen (2006)
CO	573.9	kg/tonne fuel	0	0	Winther & Nielsen (2006)
NMVOC	181.5	kg/tonne fuel	0	0	Winther & Nielsen (2006)
SO _x	20	kg/tonne fuel	0	0	Winther & Nielsen (2006)
TSP	9.5	kg/tonne fuel	0	0	Winther & Nielsen (2006)
PM ₁₀	9.5	kg/tonne fuel	0	0	Winther & Nielsen (2006)
PM _{2.5}	9.5	kg/tonne fuel	0	0	Winther & Nielsen (2006)

Notes: The table contains averaged figures between 2-stroke and 4-stroke engines, assuming a share of 75% 2-stroke and 25% 4-stroke ones. If more detailed data are available the Tier 2 method should be used.

BC fraction of PM (f-BC) = 0.05. *Source: for further information see Appendix A*

4.3 Tier 2 technology specific approach

4.3.1 Algorithm

The Tier 2 approach, like Tier 1, uses fuel consumption by fuel type, but requires country specific data on the proportion of fuel used by fuel type and engine type (slow, medium or high speed engines).

For this approach the algorithm used is:

$$E_i = \sum_m \left(\sum_j FC_{m,j} \times EF_{i,m,j} \right)$$

where:

E = annual emission (tonnes),

FC_{m,j} = mass of fuel type m used by vessels with engine type j (tonnes),

EF_{i,m,j} = average emission factor for pollutant i by vessels with engine type j using fuel type m,

i = pollutant

j = engine type (slow-, medium-, and high-speed diesel, gas turbine, and steam turbine for large ships and diesel, gasoline 2S and gasoline 4S for small vessels).

m = fuel type (bunker fuel oil, marine diesel oil/marine gas oil (MDO/MGO), LNG, gasoline),

3.3.2 Tier 2 engine and fuel-specific emission factors

In Tier II the EFs given represent average entire trip conditions. Therefore, EFs have been calculated as the weighted sum of EFs at various operating points. The weights correspond to the estimated operation frequency of the ship at a specific point, within an entire average trip. These frequencies, which have been derived by the standardized ISO 8178 test cycles E2 and E3 for ship engines, are 0.2, 0.5, 0.15 and 0.15 for the respective engine loads of 100%, 75%, 50% and 25%.

For all pollutants except NO_x, NMVOC and PM (TSP, PM₁₀ and PM_{2,5}), on Gas turbines and Steam turbines the Tier 2 emission factors for a specific fuel type are the same as Tier 1 emission factors, for each of the different types of fuel (Table 0-1 to Table). Tier 2 emission factors for NO_x, NMVOC and PM together with specific fuel consumption (g_{fuel}/kWh) are presented in Table .

For Gas turbines and Steam turbines that are presented in the table 3-5, different NO_x emissions factors are reported for 2000, 2005 and 2010. The emission factors for 2000 (Entec, 2002) are representative of the fleet before application of IMO NO_x Technical Code (see section 0) while 2005 and 2010 values (according to Entec, 2007) are obtained from the year 2000 NO_x emission factors with a reduction of 3.4% and 6.8% to account for the new engines introduced by 2005 and 2010.

These reductions are obtained starting from 2005 European Commission study (Entec, 2005) that assumed that a new engine meeting the requirements of the NO_x Technical Code has roughly 17%

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

lower NO_x emissions than a pre-2000 engine. To obtain emission factors for 2005 and 2010 fleets, as is not possible to establish the number of annual engine replacements within the fleet, the number of new low NO_x engines in the fleet is assumed only to coincide with new vessels. Between 2000 and 2010 the average annual rate of replacement for vessels is evaluated (based on data for 2000 to 2005 in Entec, 2007) to be 4%, on the basis that the overall fleet size remains constant (the approximate life cycle for a marine engine is assumed to be 25 years, which is equivalent to an annual replacement rate of 4%)³.

Table 3-5 Tier 2 emission factors for NO_x, NMVOC, PM and specific fuel consumption for different engine types/fuel combinations

Tier 2 default emission factors							
Engine type	Fuel type	NO _x 2000 (kg/tonne)	NO _x 2005 (kg/tonne)	NO _x 2010 (kg/tonne)	TSP - PM ₁₀ (kg/tonne)	PM _{2.5} (kg/tonne)	Specific fuel consumption (g fuel/kWh)
Gas turbine	BFO	20.0	19.3	18.6	0.3	0.3	305
	MDO/MGO	19.7	19.0	18.3	0.0	0.0	290
Steam turbine	BFO	6.9	6.6	6.4	2.6	2.4	305
	MDO/MGO	6.9	6.6	6.4	1.0	0.9	290

Source: Entec (2002), Entec (2007), emission factors calculated in kg/tonne of fuel using specific fuel consumption.

BFO -Bunker Fuel Oil, MDO -Marine Diesel Oil, MGO -Marine Gas Oil

For NO_x emissions of diesel engines, the following Tables provide EFs for engines constructed before 2000 (Tier 0). In order to estimate NO_x EFs for newer engines that were built after 2000, an emission reduction factor should be applied to the above mentioned EFs. This reduction factor depends on the technology regulation of the engine (Tier I, II, III) and is provided in Table 3-6.

Table 3-6 NO_x Tier reduction (%) from NO_x Tier 0

Engine type	NO _x Tier I	NO _x Tier II	NO _x Tier III
High-speed diesel	13.1	30.2	85.3
Medium-speed diesel	2.36	23.2	90.6
Slow-speed diesel	18.3	36.1	88.7

Source: Scipper (2021)

Therefore, in order to estimate NO_x emissions for Tier I, II and III engines the following equation should be applied to the provided NO_x Tier 0 EFs:

$$EF_{NO_x \text{ Tier } x} = EF_{NO_x \text{ Tier } 0} \times (1 - R_f)$$

where:

- $EF_{NO_x \text{ Tier } x}$: emission factor of NO_x Tier I, Tier II, Tier III
- $EF_{NO_x \text{ Tier } 0}$: emission factor of NO_x Tier 0 (engines constructed before 2000)

⁽³⁾ In each of the 5 and 10 years, 4% of the fleet has new engines (17% lower NO_x): 5 x 4% x 17% = 3.4% and 10 x 4% x 17% = 6.8%

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

- R_f : reduction factor according to NOx Tier

NOx emissions, in the analysis performed in the context of Scipper D4.1 (Scipper 2021), have been estimated as a function of engine load. The formed trend of NOx dependency from the engine load is considered identical for all NOx Tier regulation standards. However, it seems that the introduction of new regulations for the newer vessels have forced manufactures on engine advancements in order to reduce NOx emissions and comply with the regulations. These primary technological advancements on engine, especially for Tier I and Tier II, where no emission control is installed, probably will have a different effect on NOx emissions in relation with engine load. Further research and more detailed studies need to be performed for better understanding the subject, in order to have a more reliable estimations on NOx emissions.

In table 3-7, Tier 2 emission factors for various pollutants in kg/tonne of fuel and specific fuel oil consumption in g_{fuel}/kWh are presented.

Table 3-7 Tier 2 emission factors for pollutants and specific fuel consumption for different engine types/fuel combinations

Engine type	Fuel type	CO	NOx	NMOC	TSP, PM10	PM2.5	BC	SFOC
High-speed diesel	BFO	4.15	37.9	2.52	5.01	4.26	0.0784	234
	MDO/MGO	4.34	39.6	2.64	0.960	0.816	0.0419	224
	LNG	12.0	4.27	1.93	1.08 E-03	9.18 E-04	2.16 E-05	195
Medium-speed diesel	BFO	4.25	55.3	1.78	5.21	4.43	0.0906	202
	MDO/MGO	4.45	57.9	1.86	1.07	0.911	0.0484	193
	LNG	13.8	4.94	2.00	1.25 E-03	1.06 E-03	2.50 E-05	169
Slow-speed diesel	BFO	3.10	90.2	1.56	5.20	4.42	0.0900	204
	MDO/MGO	3.24	94.3	1.64	1.07	0.906	0.0481	195
	LNG	13.7	4.90	1.99	1.24 E-03	1.05 E-03	2.48 E-05	170

Source: Scipper (2021), pollutants EF are expressed in kg / tonne, SFOC in g_{fuel}/kWh

Notes:

1. Emission factors for LNG were derived from an LNG Lean Burn dual fuel engine technology.
2. For further information regarding default fuels used and their properties see Appendix B.

NMOC factors were derived as being 98 % of the original HC value (based on reported CH₄ factors from IPCC (1997)) for Bunker Fuel Oil and MDO/MGO, while for LNG fuel NMOC as being 15% (Scipper 2021). As outlined by Entec, emissions largely depend on the installed engine type on board a ship and the fuel used, rather than the type of vessel (container, passenger ferry, etc.).

For small pleasure boats and service boats, Tier 2 emission factors are listed in Table .

Table 3-8 Tier 2 emission factors for recreational boats (NFR 1A3dii-Small Boats)

Tier 2 default emission factors				
Fuel	Pollutant	Units	Conventional	2003/44/EC
Diesel	NO _x	kg/tonne fuel	38.4	32.8
	CO	kg/tonne fuel	19.8	18.6
	NM VOC	kg/tonne fuel	7.45	6.18
	TSP	kg/tonne fuel	4.60	3.71
	PM ₁₀	kg/tonne fuel	4.60	3.71
	PM _{2.5}	kg/tonne fuel	4.60	3.71
	NH ₃	g/tonne fuel	7.00	7.00
Gasoline: 2-stroke	NO _x	kg/tonne fuel	3.27	
	CO	kg/tonne fuel	481	
	NM VOC	kg/tonne fuel	233	
	TSP	kg/tonne fuel	12.6	
	PM ₁₀	kg/tonne fuel	12.6	
	PM _{2.5}	kg/tonne fuel	12.6	
	NH ₃	g/tonne fuel	3	
Gasoline: 4-stroke	NO _x	kg/tonne fuel	26.8	25.8
	CO	kg/tonne fuel	851	348
	NM VOC	kg/tonne fuel	26.7	29.2
	TSP	g/tonne fuel	188	188
	PM ₁₀	g/tonne fuel	188	188
	PM _{2.5}	g/tonne fuel	188	188
	NH ₃	g/tonne fuel	5	5

Source: Winther & Nielsen, 2006

BC fraction of PM (f-BC); Diesel: 0.55, Gasoline: 0.05. Source: for further information see Appendix A

3.3.3 Activity data

The Tier 2 approach should be based on the total fuel split between national navigation and international shipping (bunkers). In order to apply the more detailed emission factors, port arrival statistics need to be aggregated/split by engine type using national statistics and average factors for fuel type and ship activity.

National statistical port arrivals data for the EU are collected and provided to Eurostat by all Member States according to the Maritime Statistics Directive (Council Directive 96/64/EC). Quarterly statistics both for movements, passengers and goods split by direction, partner entity and type of cargo are available from the Eurostat Newcronos Maritime Database. These data refers for main ports only (but 90 % of the total traffic).

Detailed analysis of vessel profiles can be found in Entec (2002), Appendix D Breakdown of vessel profiles.

The following steps are required to estimate emissions:

1. obtain national statistical port arrivals data by type of vessel as in Table .
2. compute total power installed by type of vessel referring to Table .

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

3. split total power installed for each type of vessel by engine speed/fuel class using Table .
4. compute total power installed by engine speed/fuel class as sum of figures derived in step 3.
5. assume that fuel usage is proportional to total power installed to assign statistical fuel consumption (from Table and Table 3-7) to different engine speed/fuel class.
6. estimate national emissions with emission factors in Table and Table 3-7.

Table 3-9 Estimated average main engine power (total power of all engines) by ship category

Ship category	Main engine power (kW)	
	1997 fleet	2010 fleet
Liquid bulk ships	6.695	6.543
Dry bulk carriers	8.032	4.397
Container	22.929	14.871
General cargo	2.657	2.555
Ro Ro Cargo	7.898	4.194
Passenger	3.885	10.196
Fishing	837	734
Other	2.778	2.469
Tug	2.059	2.033

Source: Trozzi, 2010

Table 3-10 Percentage of installed Main Engine power by engine type/fuel class (2010 fleet)

Ship category	SSD MDO /MGO	SSD BFO	MSD MDO /MGO	MSD BFO	HSD MDO /MGO	HSD BFO	GT MDO /MGO	GT BFO	ST MDO /MGO	ST BFO
Liquid bulk ships	0.87	74.08	3.17	20.47	0.52	0.75	0.00	0.14	0.00	0.00
Dry bulk carriers	0.37	91.63	0.63	7.29	0.06	0.02	0.00	0.00	0.00	0.00
Container	1.23	92.98	0.11	5.56	0.03	0.09	0.00	0.00	0.00	0.00
General cargo	0.36	44.59	8.48	41.71	4.30	0.45	0.00	0.10	0.00	0.00
Ro Ro Cargo	0.17	20.09	9.86	59.82	5.57	2.23	2.27	0.00	0.00	0.00
Passenger	0.00	3.81	5.68	76.98	3.68	1.76	4.79	3.29	0.00	0.02
Fishing	0.00	0.00	84.42	3.82	11.76	0.00	0.00	0.00	0.00	0.00
Others	0.48	30.14	29.54	19.63	16.67	2.96	0.38	0.20	0.00	0.00
Tugs	0.00	0.00	39.99	6.14	52.80	0.78	0.28	0.00	0.00	0.00

SSD - Slow Speed Diesel, MSD - Medium Speed Diesel, HSD - High Speed Diesel, GT - Gas Turbine,
ST - Steam Turbine; MDO -Marine Diesel Oil, MGO -Marine Gas Oil, BFO -Bunker Fuel Oil

Source: Trozzi, 2010

For recreational craft, Tier 2 uses fuel sales split into technology layers as an input for the emission calculations.

For diesel-fuelled boat engines, a first-order approximation (in the absence of more detailed data) is to assume for any given inventory year, that all engine ages have the same share of total fuel

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

consumption. For Denmark as an example, this gives a 6.67 % fuel consumption share for the engines of 0 to 14 years of age (diesel engine lifetime: 15 years). Furthermore, it is known that from 2006 new sold diesel boat engines must comply with the EU emission directive 2003/44. This enables the distribution of fuel consumption shares into technology layers for the relevant inventory years.

In case of gasoline boat engines, there has been an increase in new sales of four-stroke engines lately, and a corresponding decrease in the number of new sold two-stroke engines. The assumption behind the Danish inventory is that from 1998 the number of new sales has been decreasing, and from 2006 no new sales of two-stroke engines occurs.

Table shows the change of fuel consumption for 2-stroke and 4-stroke engines from 1997 to 2015, all engines being of the conventional type. In order to find the absolute fuel consumption figure for 2-stroke and 4-stroke engines for inventory years 1998 and later, a rational approach is to use the 1997 figure for fuel consumption and then apply the index changes from Table per engine category. In this table, both 2-stroke and 4-stroke fuel consumption receives an index value of 100 in year 1997. By reading Table this means that the 2-stroke fuel consumption in e.g. 2010 is only 17.3% of the 1997 value while the 4-stroke consumption is double as much as it was in 1997 in absolute terms.

For estimating emissions from small boats, where separate national activity statistics are not collected, activity data (in tonnes of fuel by fuel type and engine standard) will need to be derived from data on the population of these vessels.

Table 33-11 Fuel consumption index numbers for small boats based on the Danish Inventory

Year	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015
2 stroke	100	100	98.8	96.4	92.8	87.9	81.6	73.9	63.5	51.9	41.5	32.3	24.2	17.3	11.5	6.92	3.46	1.15	0
4 stroke	100	105	111	118	126	135	145	156	164	173	181	188	195	200	205	208	211	213	214

Source: Winther & Nielsen, 2006

A further split into technology layers is only relevant in the case of four-stroke engines, since all two-stroke engines are of the conventional type. All engines can be assumed to have the same share of fuel consumption, which in the case of Denmark amounts to a 10 % fuel consumption share for engines between 0 and 9 years of age (gasoline engine lifetime: 10 years). From 2007 new sold gasoline boat engines must comply with Directive 2003/44/EC, and based on this, the fuel consumption for four-stroke engines can be split into the engine types conventional and technology layer 2003/44/EC.

3.4 Tier 3 Ship movement methodology

The Tier 1 and Tier 2 approaches use fuel sales as the primary activity indicator and assumes average vessel emission characteristics to calculate the emissions estimates. The Tier 3 ship movement methodology is based on ship movement information for individual ships.

The ship movement methodology is recommended when detailed ship movement data as well as technical information on the ships (e.g. engine size and technology, power installed or fuel use, hours in different activities) are available. It is suited for estimating national and international emissions. The methodology may be quite time consuming to perform. In order to meet the general reporting criteria for the country as a whole, a country must subsequently make fuel adjustments in other relevant fuel consuming sectors in order to maintain the grand national energy balance.

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

The methodologies may be used to calculate the emissions following the UNECE/EMEP definition of national and international shipping, as well as other definitions (flag, ownership, geographical area etc.).

3.4.1 Algorithm

For commercial vessels, the Tier 3 approach calculates the emissions from navigation by summing the emissions on a trip by trip basis. For a single trip the emissions can be expressed as:

$$E_{\text{Trip}} = E_{\text{Hotelling}} + E_{\text{Manoeuvring}} + E_{\text{Cruising}}$$

The total inventory is the sum over all trips of all vessels during the year. In practice it may be that data is collected for a representative sample of vessels for trips over a representative period of the year. In this case, the summed emissions should be scaled up to give the total for all trips and vessels over the whole year.

When fuel consumption for each phase is known, then emissions of pollutant *i* can be computed for a complete trip by:

$$E_{\text{Trip}, i, j, m} = \sum_p \left(FC_{j, m, p} \times EF_{i, j, m, p} \right)$$

where:

- E_{Trip} = emission over a complete trip (tonnes),
- FC = fuel consumption (tonnes),
- EF = emission factor (kg/tonne) from Table and Table 3-13,
- i = pollutant
- m = fuel type (bunker fuel oil, marine diesel oil/marine gas oil (MDO/MGO), LNG, gasoline),
- j = engine type (slow-, medium-, and high-speed diesel, gas turbine and steam turbine).
- p = the different phase of trip (cruise, hotelling, manoeuvring).

For Gas turbines and Steam turbines, emissions of other pollutants than those in Table can be calculated using the Tier 1 method with the emission factors included in Table 0-1 through Table , depending on the type of fuel. For diesel engines, emissions of pollutants can be calculated from Table 3-13.

When fuel consumption per trip phase is not known, then a different methodology is proposed for computing emissions, based on installed power and time spent in the different navigation phases. Emissions can be calculated from a detailed knowledge of the installed main and auxiliary engine power, load factor and total time spent, in hours, for each phase using the following equation.

$$E_{\text{Trip}, i, j, m} = \sum_p \left[T P_e \left(P_e \times LF_e \times EF_{e, i, j, m, p} \right) \right]$$

where:

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

E_{Trip}	= emission over a complete trip (tonnes),
EF	= emission factor (kg/tonne) from Table and Table 3-15, depending on type of vessel,
LF	= engine load factor (%)
P	= engine nominal power (kW)
T	= time (hours),
e	= engine category (main, auxiliary)
i	= pollutant
j	= engine type (slow-, medium-, and high-speed diesel, gas turbine and steam turbine).
m	= fuel type (bunker fuel oil, marine diesel oil/marine gas oil, LNG, gasoline),
p	= the different phase of trip (cruise, hotelling, manoeuvring).

The cruise time, if unknown, can be calculated as:

$$T_{\text{Cruising}} \text{ (hours)} = \frac{\text{Distance Cruised (km)}}{\text{Average Cruising Speed (km/hr)}}$$

Where the installed power of the main or auxiliary engines is not known, this can be estimated with the methodology described in chapter 0.

For Gas turbines and Steam turbines, emissions of other pollutants than those in Table can be calculated using the Tier 1 method and the emission factors included in Table 0-1 and Table 0-2, depending on the type of vessel. For diesel engines, emissions of pollutants can be calculated from Table 3-15.

For estimating emissions from small boats, where separate national activity statistics are not collected, activity data need to be derived from data on the population of these crafts, by boat type, fuel type, engine type, technology layer, and activity data for engine load factors and the estimated annual hours of use. The fuel consumption and emissions per fuel type are estimated as follows:

$$E_{i,m} = \sum_b \sum_e \sum_z \left(N_{b,e,z} \times T_{b,e,z} \times P_{b,e,z} \times LF_{b,e,z} \times EF_{b,e,z} \right)$$

where

E	= emissions by small boats per year (tonnes)
N	= number of vessels (vessels)
T	= average duration of operation of each vessel per year (hours/vessel)
P	= nominal engine power (kW)
LF	= engine load factor (%)
EF	= emission factor (g/kWh)
b	= vessel type (yawl, cabin boat, sailing, ...)
e	= engine type (inboard, onboard, 2S, 4S)
i	= pollutant (NMVOC, NH ₃ , NO _x , PM) or fuel consumption
m	= fuel type (gasoline, diesel)
z	= technology layer (conventional, 2003/44/EC)

Generally, if the calculations for navigation are based on samples, the results must be scaled to get an annual total. A Geographical Information System (GIS) can be used to spatially disaggregate the data.

3.4.2 Tier 3 engine, fuel and activity specific emission factors

The estimation of EFs in Tier3 for diesel engines was performed on the basis of a statistical analysis on reported emission factors from literature. This analysis led to the development of engine-load dependent emission factors for various pollutants. Therefore, the estimation of EFs during maneuvering/hoteling and cruising for main engine occurred by calculating the EFs at engine loads of 20% and 80%, respectively. In addition, the estimation of EFs during maneuvering/hoteling and cruising for auxiliary engine occurred by calculating the EFs at engine loads of 50% and 30%, respectively.

Emission factors of various pollutants for diesel engines and fuel type combinations are provided in Table and Table 3-13 in units of mass of pollutant per tonne of fuel and in Table and Table 3-15 in units of mass of pollutant per kWh. In this table, the specific fuel consumption is also given. For the other pollutants on Gas turbines and Steam turbines emission factors of Tier 1 can be used (Table 0-1 and Table 0-2).

1. For small recreational and service vessels, emission factors are listed in Emission factors for LNG were derived from an LNG Lean Burn dual fuel engine technology
2. The emissions of NMVOC were derived as being 98 % of the original HC value (based on reported CH₄ factors from IPCC (1997)) for Bunker fuel Oil and MDO/MGO, while for LNG fuel NMVOC as being 15%.
3. For further information regarding default fuels used and their properties see Appendix B.

Table , taken from Winther and Nielsen (2006).

Table 3-12 Tier 3 emission factors for NO_x , NMVOC, PM for Gas and Steam turbines/fuel combinations and vessel trip phases (cruising, hotelling, manoeuvring)

Engine	Phase	Engine type	Fuel type	NO _x EF 2000 (kg/tonne)	NO _x EF 2005 (kg/tonne)	NO _x EF 2010 (kg/tonne)	NMVOC EF (kg/tonne)	TSP PM ₁₀ PM _{2.5} EF (kg/tonne)
Main	Cruise	Gas turbine	BFO	20.0	19.3	18.6	0.3	0.3
			MDO/MGO	19.7	19.0	18.3	0.3	0.0
		Steam turbine	BFO	6.9	6.6	6.4	0.3	2.6
			MDO/MGO	6.9	6.6	6.4	0.3	1.0
	Manoeuvring Hotelling	Gas turbine	BFO	9.2	8.9	8.6	1.5	4.5
			MDO/MGO	9.1	8.8	8.5	1.5	1.6
		Steam turbine	BFO	5.1	4.8	4.7	0.9	7.1
			MDO/MGO	5.0	5.0	4.7	0.9	2.8

Source: Entec (2002), Entec (2007), the emission factors for NMVOC was been derived as 98 % of the original HC emission factors value, based on reported CH₄ factors from IPCC (1997).

Note

See Table 0-1 and Table 0-2 for emission factors for other pollutants.

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

Table 3-13 Tier 3 emission factors for pollutants for Diesel engine types/fuel combinations and vessel trip phases (cruising, hotelling, manoeuvring) in kg/tonne of fuel

Engine	Phase	Engine type	Fuel type	CO (kg/tonne)	NOx Tier 0 (kg/tonne)	NMVOOC (kg/tonne)	TSP, PM ₁₀ , PM _{2.5} (kg/tonne)	BC (kg/tonne)	
Main	Cruise	High-speed diesel	BFO	3,23	39,8	2,05	5,29	0,0533	
			MDO/MGO	3,38	41,6	2,15	0,916	0,0285	
			LNG	8,07	4,10	0,71	1,01E-03	2,02E-05	
		Medium-speed diesel	BFO	3,32	58,2	1,45	5,46	0,0616	
			MDO/MGO	3,47	60,8	1,52	1,016	0,0329	
			LNG	9,33	4,74	0,82	1,17E-03	2,33E-05	
		Slow-speed diesel	BFO	2,41	94,7	1,27	5,45	0,0612	
			MDO/MGO	2,52	99,1	1,33	1,01	0,0327	
			LNG	9,26	4,71	0,81	1,16E-03	2,32E-05	
	Auxiliary	Manoeuvring Hotelling	High-speed diesel	BFO	8,49	36,8	3,88	4,20	0,203
				MDO/MGO	8,88	38,5	4,06	1,21	0,109
				LNG	23,2	4,72	4,69	2,04E-03	4,09E-05
			Medium-speed diesel	BFO	8,70	53,8	2,74	4,48	0,235
				MDO/MGO	9,10	56,3	2,86	1,37	0,126
				LNG	26,8	5,46	5,42	2,36E-03	4,73E-05
Slow-speed diesel			BFO	6,33	87,6	2,40	4,47	0,233	
			MDO/MGO	6,62	91,7	2,52	1,36	0,125	
			LNG	26,6	5,4	5,38	0,00235	4,69E-05	
Cruise		High-speed diesel	BFO	6,40	35,1	3,52	4,09	0,137	
			MDO/MGO	6,70	36,7	3,68	1,07	0,073	
			LNG	20,7	3,93	3,76	0,00	2,29E-05	
		Medium-speed diesel	BFO	6,56	51,3	2,49	4,34	0,159	
			MDO/MGO	6,86	53,6	2,60	1,21	0,085	
			LNG	23,9	4,55	4,35	0,00	2,65E-05	
	High-speed diesel	BFO	4,68	36,3	2,77	4,37	0,088		
		MDO/MGO	4,90	38,0	2,89	0,98	0,047		
		LNG	14,9	2,90	1,95	0,00	1,84E-05		
Manoeuvring Hotelling	Medium-speed diesel	BFO	4,80	53,1	1,95	4,58	0,101		
		MDO/MGO	5,02	55,5	2,04	1,11	0,054		
		LNG	17,3	3,35	2,25	0,00	2,13E-05		

Source: Scipper (2021)

Notes:

1. Emission factors for LNG were derived from an LNG Lean Burn dual fuel engine technology.
2. The emissions of NMVOOC were derived as being 98 % of the original HC value (based on reported CH₄ factors from IPCC (1997)) for Bunker fuel Oil and MDO/MGO, while for LNG fuel NMVOOC as being 15%.
3. For further information regarding default fuels used and their properties see Appendix B.

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

Table 3-14 Tier 3 emission factors for NO_x, NMVOC, PM and Specific Fuel Consumption for Gas and Steam turbines/fuel combinations and vessel trip phases (cruising, hotelling, manoeuvring) in g/kWh

Engine	Phase	Engine type	Fuel type	NO _x EF 2000 (g/kWh)	NO _x EF 2005 (g/kWh)	NO _x EF 2010 (g/kWh)	NMVOC EF (g/kWh)	TSP PM ₁₀ PM _{2.5} EF (g/kWh)	Specific fuel consumption (g fuel/kWh)
Main	Cruise	Gas turbine	BFO	6.1	5.9	5.7	0.1	0.1	305.0
			MDO/MGO	5.7	5.5	5.3	0.1	0.0	290.0
		Steam turbine	BFO	2.1	2.0	2.0	0.1	0.8	305.0
			MDO/MGO	2.0	1.9	1.9	0.1	0.3	290.0
	Manoeuvring Hotelling	Gas turbine	BFO	3.1	3.0	2.9	0.5	1.5	336.0
			MDO/MGO	2.9	2.8	2.7	0.5	0.5	319.0
		Steam turbine	BFO	1.7	1.6	1.6	0.3	2.4	336.0
			MDO/MGO	1.6	1.6	1.5	0.3	0.9	319.0

BFO –Bunker Fuel Oil, MDO –Marine Diesel Oil, MGO –Marine Gas Oil

Source: Entec (2002), Entec (2007), the emission factors for NMVOC was been derived as 98 % of the original HC emission factors value, based on reported CH₄ factors from IPCC (1997).

Note. See Table 0-1 and Table 0-2 for emission factors for other pollutants.

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

Table 3-15 Tier 3 emission factors for pollutants and Specific Fuel Consumption for Diesel engine types/fuel combinations and vessel trip phases (cruising, hotelling, manoeuvring) in g/kWh

Engine	Phase	Engine type	Fuel type	CO (g/kWh)	NOx Tier 0 (g/kWh)	NMVOG (g/kWh)	TSP, PM ₁₀ , PM _{2.5} (g/kWh)	BC (g/kWh)	SFOC (gfuel/kWh)	
Main	Cruise	High-speed diesel	BFO	0,693	8,53	0,440	1,13	0,0114	214	
			MDO/MGO	0,693	8,53	0,440	0,188	0,00584	205	
			LNG	1,44	0,732	0,127	1,80E-04	3,60E-06	178	
		Medium-speed diesel	BFO	0,614	10,8	0,269	1,01	0,0114	185	
			MDO/MGO	0,614	10,8	0,269	0,180	0,00584	177	
			LNG	1,44	0,732	0,127	1,80E-04	3,60E-06	154	
		Slow-speed diesel	BFO	0,451	17,7	0,238	1,02	0,0114	187	
			MDO/MGO	0,451	17,7	0,238	0,180	0,00584	178	
			LNG	1,44	0,732	0,127	1,80E-04	3,60E-06	156	
	Auxiliary	Manoeuvring Hotelling	High-speed diesel	BFO	2,70	11,7	1,233	1,34	0,0646	318
				MDO/MGO	2,70	11,7	1,233	0,367	0,0330	304
				LNG	6,15	1,25	1,242	5,41E-04	1,08E-05	265
			Medium-speed diesel	BFO	2,39	14,8	0,753	1,23	0,0646	275
				MDO/MGO	2,39	14,8	0,753	0,361	0,0330	263
				LNG	6,15	1,25	1,242	5,41E-04	1,08E-05	229
			Slow-speed diesel	BFO	1,75	24,3	0,666	1,24	0,0646	277
				MDO/MGO	1,75	24,3	0,666	0,361	0,0330	265
				LNG	6,15	1,25	1,242	5,41E-04	1,08E-05	231
Cruise		High-speed diesel	BFO	1,81	9,94	0,997	1,16	0,0389	283	
			MDO/MGO	1,81	9,94	0,997	0,290	0,0199	271	
			LNG	4,88	0,928	0,887	2,70E-04	5,41E-06	236	
		Medium-speed diesel	BFO	1,61	12,6	0,609	1,06	0,0389	245	
			MDO/MGO	1,61	12,6	0,609	0,284	0,0199	234	
			LNG	4,88	0,928	0,887	2,70E-04	5,41E-06	204	
		Manoeuvring Hotelling	High-speed diesel	BFO	1,10	8,53	0,649	1,03	0,0206	235
				MDO/MGO	1,10	8,53	0,649	0,221	0,0105	224
				LNG	2,92	0,566	0,380	1,80E-04	3,60E-06	196
Medium-speed diesel	BFO		0,974	10,8	0,397	0,93	0,0206	203		
	MDO/MGO		0,974	10,8	0,397	0,215	0,0105	194		
	LNG		2,92	0,566	0,380	1,80E-04	3,60E-06	169		

Source: Scipper (2021)Notes:

- Emission factors for LNG were derived from an LNG Lean Burn dual fuel engine technology
- The emissions of NMVOG were derived as being 98 % of the original HC value (based on reported CH₄ factors from IPCC (1997)) for Bunker fuel Oil and MDO/MGO, while for LNG fuel NMVOG as being 15%.
- For further information regarding default fuels used and their properties see Appendix B.

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

Table 3-16 Tier 3 emission factors for recreational vessels

Fuel type	Vessel type	Engine Type	Technology Layer	Nominal power	NMVOC	NH ₃	NO _x	TSP PM ₁₀ PM _{2.5}	Fuel		
				[kW]						[g/kWh]	
Gasoline	Other boats (< 20 ft)	Out board	2S	2003/44	8	45.49	0.002	2	10	791	
				Conv.	8	254.69	0.002	2	10	791	
			4S	2003/44	8	21.60	0.002	7	0.08	426	
				Conv.	8	21.60	0.002	7	0.08	426	
	Yawls and cabin boats	Out board	2S	2003/44	20	36.17	0.002	3	10	791	
				Conv.	20	170.45	0.002	3	10	791	
			4S	2003/44	20	12.60	0.002	10	0.08	426	
				Conv.	20	12.60	0.002	10	0.08	426	
	Sailing boats (< 26 ft)	Out board	2S	2003/44	10	42.61	0.002	2	10	791	
				Conv.	10	254.69	0.002	2	10	791	
			4S	2003/44	10	21.60	0.002	7	0.08	426	
				Conv.	10	21.60	0.002	7	0.08	426	
	Speed boats	In board	4S	2003/44	90	9.00	0.002	12	0.08	426	
				Conv.	90	9.00	0.002	12	0.08	426	
			Out board	2S	2003/44	50	31.51	0.002	3	10	791
				Conv.	50	170.45	0.002	3	10	791	
		Out board	4S	2003/44	50	12.60	0.002	10	0.08	426	
				Conv.	50	12.60	0.002	10	0.08	426	
Water scooters			Out board	2S	2003/44	45	31.91	0.002	3	10	791
					Conv.	45	170.45	0.002	3	10	791
	4S	2003/44		45	12.60	0.002	10	0.08	426		
		Conv.		45	12.60	0.002	10	0.08	426		
Diesel	Motor boats (27–34 ft)	In board	2003/44	150	1.67	0.002	8.6	1	275		
			Conv.	150	1.97	0.002	8.6	1.2	275		
	Motor boats (> 34 ft)		2003/44	250	1.58	0.002	8.6	1	275		
			Conv.	250	1.97	0.002	8.6	1.2	275		
	Motor boats (< 27 ft)		2003/44	40	1.77	0.002	9.8	1	281		
			Conv.	40	2.17	0.002	18	1.4	281		
	Motor sailors		2003/44	30	1.87	0.002	9.8	1	281		
			Conv.	30	2.17	0.002	18	1.4	281		
	Sailing boats (> 26 ft)		2003/44	30	1.87	0.002	9.8	1	281		
			Conv.	30	2.17	0.002	18	1.4	281		

Source: Winther & Nielsen, 2006

BC fraction of PM (f-BC); Diesel: 0.55, Gasoline: 0.05. Source: for further information see Appendix A

Activity data

The LMIS (Lloyd's Maritime Information Service) database records all ship movements world-wide. The database includes ship size, destination, approximate time of arrival and departure, engine type and number, etc. The data are available in computerised form. The database covers all ships greater

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

than 250–500 gross tonnes. Ferries and fishing vessels are typically not included. Smaller ports are also excluded. A week or a whole year may be chosen. A selection may also be made on area or on ship nationality. The dataset will have to be purchased.

Port calling statistics are generally available from national sources (statistical offices or the harbour authorities) in all countries, in some countries covering the larger ports only. The information is similar to the LMIS data without engine details. On the other hand, it will give more accurate information about the actual time spent in port. The national port calling statistics may also be useful for validating information from other sources.

In some countries, detailed statistics on individual ships are collected. Such statistics may include, for example, a ship movement survey for a sample of the fleet.

For ferries, ship movement data will be available from timetables giving the departures and destinations. International timetables include all main ferry routes in Europe, but more detailed information (covering smaller ferries) will be available from national sources. Such information must be supplemented with engine information. It should be distinguished between summer and winter when applying timetables.

The International Council for the Exploration of the Seas collects information on fishing deliveries (catch area and port of landing) which gives an indication of the vessel movements. The data here are confidential, but are based on national reporting which may be available. The information must be linked to a vessel register. Additional information must be collected on the time spent fishing, as fishing vessels will not move in straight lines when operating. Fishing vessels may also be used for other activities than fishing. Factory ships and trawlers may have significant fuel use connected to trawling, processing and refrigeration, in addition to the vessel movement.

The customs or coast guard authorities may keep records of the international ship traffic in national territorial waters.

Two different procedures are available in Tier 3 starting on a basis of either fuel consumption or engine power.

a. Estimating emissions based on fuel consumption

This procedure is applicable only where detailed information about fuel consumptions for each ship/engine type combination in the different navigation phases is available; otherwise use the alternative engine power based procedure below.

1. Obtain fuel consumption for each individual ship, engine type/fuel class and ship activity. This may be done for the whole year or a representative sample of the year, for all ships or for a representative sample of the ships for each ship category and engine type/fuel class. This choice will depend on the resources available and the required accuracy of the study.
2. Calculate emissions for each ship category and engine type/fuel class multiplying by the emission factors from Table and Table 3-13.

b. Estimating emissions based on engine power

1. Obtain ship movement data: place of departure, place of arrival, time of departure and time of arrival for each individual ship. This may be done for the whole year or a representative sample of the year, for all ships or for a representative sample of the ships. This choice will depend on the resources available and the required accuracy of the study.
2. Determine the sailing routes and distances between ports. This may be done individually or fitted into the main shipping lanes. A GIS (Geographical Information System) is useful, but not necessary, for this task. If a GIS is not available, there are standard distance tables for distances between main ports (Thomas Reed Publications, 1992). The main shipping routes are given in the IMO publication 'Ships' Routing' (International Maritime Organization, 1987). Distances are given in Reed's Marine Distance Table (Thomas Reed Publications, 1992).
3. Characterise each ship by ship category (as in Table) and engine type/fuel class (if unknown use Table) and record the installed main or auxiliary engine power. A ship register, giving the size and engine type of individual ships, is useful for this. Such a register of the national fleet should be available in most countries but usually only covering national ships. Lloyds Register's Register of Ships will provide details of national and international shipping greater than 100 GT. If engine power is unknown, and only gross tonnage (GT) is available, installed main engine power can be obtained from Table (with reference to 1997 world fleet, 2010 world fleet and 2006 Mediterranean Sea fleet) and then installed auxiliary engine power from Table (with reference to 2010 world fleet and 2006 Mediterranean Sea fleet while 1997 world fleet data are not available).
4. Determine the total sailing time for each ship category and engine type/fuel class, either based on the distance and average cruise speed (Table) or time of departure and arrival. The choice should be based on an assessment of the quality of the data.
5. Determine total hotelling and manoeuvring time for each ship category and engine type/fuel class by port survey or on the basis of average time spent values provided (Table).
6. Calculate emissions for each ship category and engine type/fuel class multiplying total time spent in each phases, as determined in previous steps 4 and 5, by the installed main and auxiliary engine power, for each ship category, calculated as determined in step 3, load factors (and for main engine % time of operation) from Table and emission factors from Table and Table 3-15.

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

Table 3-17 Installed main engine power as a function of gross tonnage (GT)

Ship categories	2010 world fleet	1997 world fleet	Mediterranean Sea fleet (2006)
Liquid bulk ships	14.755*GT ^{0.6082}	29.821*GT ^{0.5552}	14.602*GT ^{0.6278}
Dry bulk carriers	35.912*GT ^{0.5276}	89.571*GT ^{0.4446}	47.115*GT ^{0.504}
Container	2.9165*GT ^{0.8719}	1.3284*GT ^{0.9303}	1.0839*GT ^{0.9617}
General Cargo	5.56482*GT ^{0.7425}	10.539*GT ^{0.6760}	1.2763*GT ^{0.9154}
Ro Ro Cargo	164.578*GT ^{0.4350}	35.93*GT ^{0.5885}	45.7*GT ^{0.5237}
Passenger	9.55078*GT ^{0.7570}	1.39129*GT ^{0.9222}	42.966*GT ^{0.6035}
Fishing	9.75891*GT ^{0.7527}	10.259*GT ^{0.6919}	24.222*GT ^{0.5916}
Other	59.049*GT ^{0.5485}	44.324*GT ^{0.5300}	183.18*GT ^{0.4028}
Tugs	54.2171*GT ^{0.6420}	27.303*GT ^{0.7014}	

Source: Trozzi (2010) for 2010 and 1997 world fleets; Entec (2007) for 2006 Mediterranean Sea fleet; (for 1997 fleet a conversion 1 GT = 1.875 GRT was used)

Table 3-18: Estimated average vessel ratio of Auxiliary Engines / Main Engines by ship type

Ship categories	2010 world fleet	Mediterranean Sea fleet (2006)
Liquid bulk ships	0.30	0.35
Dry bulk carriers	0.30	0.39
Container	0.25	0.27
General Cargo	0.23	0.35
Ro Ro Cargo	0.24	0.39
Passenger	0.16	0.27
Fishing	0.39	0.47
Other	0.35	0.18
Tugs	0.10	

Source: Trozzi (2010) for 2010 world fleet; Entec (2007) for 2006 Mediterranean Sea fleet

Table 3-19 Assumptions for the average cruise speed and average duration of in-port activities

Ship Type	Ave.Cruise Speed (km/h)	Manoeuvring time (hours)	Hotelling time (hours)
Liquid bulk ships	26	1.0	38
Dry bulk carriers	26	1.0	52
Container	36	1.0	14
General Cargo	23	1.0	39
Ro-Ro Cargo	27	1.0	15
Passenger	39	0.8	14
Fishing	25	0.7	60
Other	20	1.0	27

Source: Elaboration from Entec (2002)

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

Table 3-20 Estimated % load of MCR (Maximum Continuous Rating) of Main and Auxiliary Engine for different ship activity

Phase	% load of MCR Main Engine	% time all Main Engine operating	% load of MCR Auxiliary Engine
Cruise	80	100	30
Manoeuvring	20	100	50
Hotelling (except tankers)	20	5	40
Hotelling (tankers)	20	100	60

Source: Entec (2002)

Table lists the activity data for diesel, two-stroke and four-stroke gasoline-fuelled recreational craft typically being used, derived from the Danish emission inventory (Winther and Nielsen, 2006).

Table 3-21 Activity data for recreational craft in Denmark

Fuel type	Engine type	Vessel type	Engine	Engine size (kW)	Ann, Hours (hours)	Load factor	Lifetime (years)
Gasoline	2-stroke	Yawls and cabin boats	Out-board	20	50	0.5	10
		Sailing boats (< 26 ft)	Out-board	10	5	0.5	10
		Speed boats	Out-board	50	50	0.5	10
		Other boats (< 20 ft)	Out-board	8	30	0.5	10
		Water scooters	Built-in	45	10	0.5	10
	4-stroke	Yawls and cabin boats	Out-board	20	50	0.5	10
		Sailing boats (< 26 ft)	Out-board	10	5	0.5	10
		Speed boats	In-board	90	75	0.5	10
		Speed boats	Out-board	50	50	0.5	10
		Other boats (< 20 ft)	Out-board	8	30	0.5	10
		Water scooters	Built in	45	10	0.5	10
Diesel		Motor boats (27-34 ft)	In-board	150	150	0.5	15
		Motor boats (> 34 ft)	In-board	250	100	0.5	15
		Motor boats (< 27 ft)	In-board	40	75	0.5	15
		Motor sailers	In-board	30	75	0.5	15
		Sailing boats (< 26 ft)	In-board	30	25	0.5	15

Source: Winther & Nielsen, 2006

Effect of control techniques on emissions

In order to include the effect of the various emission control techniques that have been presented on chapter 2-4 to the calculated emission factors for International Maritime, an additional process should be applied. Based on the emission reduction percentages which are achieved by the application of the control techniques and which are presented in Table 3-22, the calculated emission factors of ships as output of all three methodological Tiers, can be multiplied by the reduction percentage of each emission control technology. Total emissions are then calculated as the weighted average of all emission control technologies for each pollutant.

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

Table 3-22 Overview of emission reduction percentage of different emission control technologies

Emission control technology	Fuel	SFOC (%)	CO (%)	NOx (%)	SO ₂ (%)	NMVOC (%)	PM (%)
Wet Scrubber	Bunker Fuel Oil	-2,15	-3,61	5,84	98,8	52,2	31,6
	MDO/MGO	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.
SCR	Bunker Fuel Oil	0,50	-63,0	89,6	23,5	68,6	34,8
	MDO/MGO	-1,48	-55,8	70,2	6,57	78,3	6,10
DOC	Bunker Fuel Oil	1,09	42,9	-0,63	-1,30	50,0	50,0
	MDO/MGO	0,00	99,2	20,4	0,00	97,2	-113
DPF	Bunker Fuel Oil	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.
	MDO/MGO	-1,50	0,00	0,00	-1,50	0,00	91,70
SCR+Scrubber	Bunker Fuel Oil	-2,98	-119	80,1	99,7	68,6	34,8
	MDO/MGO	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.
SCR+DPF	Bunker Fuel Oil	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.
	MDO/MGO	-1,50	-55,8	92,0	4,00	78,3	96,0
DOC+Scrubber	Bunker Fuel Oil	1,09	42,9	5,66	99,1	50,0	50,0
	MDO/MGO	n.r.	n.r.	n.r.	n.r.	n.r.	n.r.

Source: Emerge (2020)

Notes:

1. Positive values mean reduction of pollutants through the emission control system;
2. Negative values mean increase of pollutants through the emission control system;
3. n.r.: not relevant;
4. The usage of scrubber technology provides SO₂ emission reduction that fulfils the regulation of 0.1% FSC limit in ECAs.

Therefore, in case where emission control technologies exist, a corrected EF is estimated as follows:

- For Tier 2:

$$RevEF_{i,m,j} = \sum_c (EF_{i,m,j} \times (1 - C_c) \times f_c)$$

where:

RevEF_{i,m,j} = revised fuel consumption-specific emission factor of pollutant i, fuel type m [kg/tonne] and engine type j;

EF_{i,m} = fuel consumption-specific emission factor of pollutant i, fuel type m [kg/tonne] and engine

type i = pollutant

m = fuel type (bunker fuel oil, marine diesel oil, marine gas oil, gasoline)

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

j = engine type (slow-, medium-, and high-speed diesel, gas turbine, and steam turbine for large ships and diesel, gasoline 2S and gasoline 4S for small vessels).

C_c = correction factor for emission control technologies.

f_c = distribution of emission control technology on the considered fleet.

Distribution of emission control technology on the considered fleet is calculated as follows:

$$f_c = \frac{\text{fleet with specific emission control technology}}{\text{total fleet}}$$

This $RevEF_{i,m,j}$ replaces the default $EF_{i,m,j}$ in the general equation of chapter 3.3.1.

- For Tier 3:

The same process has to be applied with the only difference the default emission factors are the respected for each Tier method.

3.5 Species profile

The speciation of PAHs as determined by Lloyd's Register (1995) is given in Table 3-23. Cooper et al, (1996) has measured the C₂-C₆ and C₆-C₁₂ hydrocarbon concentrations in exhaust from two ferries given in Table 3-24.

Table 3-23 PAH emissions, distribution by species

Species	Average (%)	Range (%)
Phenanthrene	37	32-54
Anthracene	1	0-2
Fluoranthene	11	9-15
Pyrene	14	12-20
3,6-dimethylphenanthrene	4	3-5
Triphenylene	12	9
Benzo(b)-fluorene	6	2-19
Benzo(a)anthracene	2	0-2
Chrysene	5	3-9
Benzo(e)-pyrene	2	0
Benzo(j)fluoranthene	0	0
Perylene	0	0-3
Benzo(b)-fluoranthene	1	0-2
Benzo(k)-fluoranthene	0	0
Benzo(a)pyrene	0	0
Dibenzo(a,j)anthracene	0	0-1
Dibenzo(a,l)pyrene	0	0
Benzo(g,h,i)perylene	1	0-2
Dibenzo(a,h)anthracene	1	0-6
Ideno(1,2,3-c,d)pyrene	0	0-1
3-methyl-cholanthrene	0	0
Anthanthrene	0	0

Source: Lloyd's Register, 1995

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

Table 3-24 Exhaust hydrocarbon concentrations (%)

Species	Ferry 1	Ferry 2
Ethane	0	0
Ethene	5	20
Propane	0	0
Propene	2	6
Ethyne	0	0
Propadiene	0	0
Butane	0	0
trans-2-Butene	0	0
1-Butene	0	1
Isobutene	1	18
cis-2-butene	0	0
Pentane	0	0
Propyne	0	0
3-Methyl-1-butene	0	0
trans-2-Pentene	0	0
1-Pentene	0	1
cis-2-Pentene	0	0
Hexane	0	0
Other C ₆ alkenes	0	0
1-Hexene	0	0
Nonane	10	0
Decane	25	0
Undecane	19	0
Dodecane	14	0
Benzene	4	35
Toluene	5	15
Ethylbenzene	1	0
o-Xylene	2	0
m Plus p-Xylene	4	4
1,3,5-Trimethylbenzene	2	0
1,2,4-Trimethylbenzene	2	0
1,2,3-Trimethylbenzene	3	0

Source: Cooper et.al, 1996.

3.6 Military shipping activities

Emissions from military water-borne fuel use can be estimated using the same algorithm as is used for the Tier 1 approach (see subsection 3.2). Due to the special characteristics of the operations, situations, and technologies (e.g. aircraft carriers, very large auxiliary power plants, and unusual engine types) associated with military water-borne navigation, a more detailed method of data analysis is encouraged when data are available. Inventory compilers should therefore consult military experts to determine the most appropriate emission factors for the country's military water-borne navigation.

Due to confidentiality issues (see completeness and reporting); many inventory compilers may have difficulty obtaining data for the quantity of military fuel use. Military activity is defined here as those activities using fuel purchased by or supplied to military authorities in the country. It is good practice to apply the rules defining civilian domestic and international operations in water-borne navigation to military operations when the data necessary to apply those rules are comparable and available. Data on military fuel use should be obtained from government military institutions or fuel suppliers.

If data on fuel split are unavailable, all the fuel sold for military activities should be treated as domestic.

Emissions resulting from multilateral operations pursuant to the Charter of the United Nations should not be included in national totals; other emissions related to operations shall be included in the national emissions totals of one or more parties involved. The national calculations should take into account fuel delivered to the country's military, as well as fuel delivered within that country but used by the military of other countries. Other emissions related to operations (e.g. off-road ground support equipment) should be included in the national emissions totals in the appropriate source category.

4. Data quality

4.1 Completeness

If Tier 3 approach is used to calculate the fuel consumption and emissions for navigation, it is necessary to make fuel adjustments in other relevant fuel consuming sectors in order to maintain the grand national energy balance. The latter point is essential if the general reporting criteria for the country as a whole is to be followed.

If Tier 1 and 2 estimates are calculated, the methods should be reconciled to total fuel use. Since countries generally have effective accounting systems to measure total fuel consumption. The largest area of possible incomplete coverage of this source category is likely to be associated with misallocation of navigation emissions in another source category. For instance, for small watercraft powered by gasoline engines, it may be difficult to obtain complete fuel use records and some of the emissions may be reported as industrial (when industrial companies use small watercraft), other off-road mobile or stationary power production. Estimates of water-borne emissions should include not only fuel for marine shipping, but also for passenger vessels, ferries, recreational watercraft, other inland watercraft, and other gasoline-fuelled watercraft.

Fugitive emissions from transport of fossil fuels should be estimated and reported under the NFR category 1.B.2.a.v Distribution of oil products. Most fugitive emissions occur during loading and unloading and are therefore accounted under that category. Emissions during travel are considered insignificant.

Completeness may also be an issue where military data are confidential, unless military fuel use is aggregated with another source category.

There are additional challenges in distinguishing between domestic and international emissions. As each country's data sources are unique for this category, it is not possible to formulate a general rule regarding how to make an assignment in the absence of clear data. It is good practice to specify clearly the assumptions made so that the issue of completeness can be evaluated.

4.2 Verification

It is good practice to conduct quality control checks. Specific procedures of relevance to this source category are outlined below.

Comparison of emissions using alternative approaches

If possible, the inventory compiler should compare estimates determined for water-borne navigation using both Tier 1 and Tier 2 approaches. The inventory compiler should investigate and explain any anomaly between the emission estimates. The results of such comparisons should be recorded.

Review of emission factors

The inventory compiler should ensure that the original data source for national factors is applicable to each category and that accuracy checks on data acquisition and calculations have been performed. If national emission factors are available, they should be used, provided that they are well documented. For the default factors, the inventory compiler should ensure that the factors are applicable and relevant to the category.

If emissions from military use were developed using data other than default factors, the inventory compiler should check the accuracy of the calculations and the applicability and relevance of the data.

Check of activity data

The source of the activity data should be reviewed to ensure applicability and relevance to the category. Where possible, the data should be compared to historical activity data or model outputs to look for anomalies. Data could be checked with productivity indicators such as fuel per unit of water-borne navigation traffic performance compared with other countries. For example, the previous European Topic Centre on Air and Climate Change (ETC/ACC) of the Environment Agency (EEA) provided a useful dataset from 2003, http://air-climate.eionet.eu.int/databases/TRENDS/TRENDS_EU15_data_Sep03.xls, which presents emissions and passenger/freight volume for each transportation mode for Europe. The information for shipping is very detailed. Examples of such indicators include: for ships with less than 3 000 GT the CO₂-index range from 0.09 to 0.16 kg CO₂/tonne-km; for larger ships between 0.04 and 0.14 kg CO₂/tonne-km; and for passenger ferries, the factors range from 0.1–0.5 kg CO₂/passenger-km.

External review

The inventory compiler should perform an independent, objective review of calculations, assumptions or documentation of the emissions inventory to assess the effectiveness of the QC programme. The peer review should be performed by expert(s) (e.g. transport authorities, shipping companies, and military staff) who are familiar with the source category and who understand inventory requirements.

4.3 Developing a consistent time series and recalculation

It is good practice to determine fuel use using the same method for all years. If this is not possible, data collection should overlap sufficiently in order to check for consistency in the methods employed.

Emissions of NO_x, PM, NMVOC and CO will depend on engine type and technology. Unless technology-specific emission factors have been developed, it is good practice to use the same fuel-specific set of emission factors for all years.

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

Mitigation activities resulting in changes in overall fuel consumption will be readily reflected in emission estimates if actual fuel activity data are collected. Mitigation options that affect emission factors, however, can only be captured by using engine-specific emission factors, or by developing control technology assumptions. Changes in emission factors over time should be well documented.

Marine diesel oil and bunker fuel oil are the fuels used primarily for large sources within water-borne navigation. As the sulphur and metals contents of these fuels may vary over the time series, the source of sulphur content should be explicitly stated, as well as the dates the fuels were tested.

4.3.1 Uncertainties

Entec (2002) provides estimates of uncertainties for emission factors as indicated in the table below.

Table 0-1: Estimated uncertainties given as percentage related to the emission factors

Parameter	at sea	manoeuvring	in port
NO _x	±20%	±40%	±30%
SO _x	±10%	±30%	±20%
NMVOG	±25%	±50%	±40%
PM	±25%	±50%	±40%
Fuel Consumption	±10%	±30%	±20%

Note: Estimated uncertainties at the 95% confidence interval given as a relative percent of the emission factors (in g/kWh or kg/tonne fuel). For example the NO_x emission factor at sea has a 20 % relative uncertainty assigned, which means that 95 % of ships' emissions will lie within ± 20 % of the assigned factors. Source: Entec (2002)

Much of the uncertainty in the activity data for water-borne navigation emission estimates is related to the difficulty of distinguishing between domestic and international fuel consumption. With complete survey data, the uncertainty may be low (say ±5 percent), while for estimations or incomplete surveys the uncertainties may be considerable (say ±50 percent). The uncertainty will vary widely from country to country and is difficult to generalise. Global data sets may be helpful in this area, and it is expected that reporting will improve for this category in the future.

4.4 Gridding

The EMEP modelling centres do not need very detailed and exact data since the EMEP grids are quite large (50*50 sq km) and therefore an approach using lesser detail may be sufficient. One approach may be to use harbour statistics to get time in dock, multiply by a dock fuel consumption factor per ship category (if appropriate), see where the ship goes from (sample) transport statistics and multiply by a consumption factor per nm (nautical mile). The emissions are then distributed by a straight line going from departure to destination.

4.5 Reporting and documentation

No specific issues.

5. References

Concawe, (1994): 'The contribution of sulphur dioxide emissions from ships to coastal deposition and air quality in the channel and southern north sea area'. Report No 2/94. The Oils Companies' European Organization for Environment and Health Protection. Brussels. (Pre-publications).

Cooper, D.A., K. Peterson and D. Simpson (1996), Atmospheric Environment, vol. 30, pp. 2463–2473, 1996.

Cooper, D.A., and Gustafsson, T. (2004). 'Methodology for calculating emissions from ships: 1. Update of emission factors'. Report series SMED and SMED&SLU 4.

Cooper D.A., (2005) HCB, PCB, PCDD and PCDF emissions from ships, Atmospheric Environment vol. 39,4901-4912, 2005.

EMEP, (https://www.ceip.at/ms/ceip_home1/ceip_home/webdab_emepdatabase/), accessed 19 July 2019.

Emerge (2020). Emerge project Deliverable D1.1 'Summary and analysis of available abatement methods for SO_x, NO_x and PM, together with data on emissions, waste streams, costs and applicability'.

Entec UK Limited (2002). 'Quantification of emissions from ships associated with ship movements between ports in the European Community'. Final report July 2002.

Entec UK Limited (2005): 'Service Contract on Ship Emissions: Assignment, Abatement and Market-based Instruments'. Contract No: 070501/2004/383959/MAR/C1 August 2005.

Entec UK Limited (2007). 'Ship Emissions Inventory – Mediterranean Sea, Final Report for Concawe', April 2007

EPA (1985). 'Compilation of Air Pollutant Emission Factors: Volume II: Mobile sources – Vessels AP-42', Fourth edition, September 1985.

Ex-Tremis (2008). Ex-Tremis — Ex-Tremis project — Maritime Inventory. For information see the website www.ex-tremis.eu/ and final report: Chiffi, Fiorello, Schrooten, De Vlieger, Ex-Tremis, 'Exploring non-road transport emissions in Europe', JRC-IPTS (2008). International Maritime Organization, Ship's Routing. Fifth edition. International Maritime Organization. London, 1987.

IPCC (1996). Revised 1996 IPCC Guidelines for National Greenhouse Gas Inventories.

IPCC (1997). IPCC Guidelines for National Greenhouse Gas Inventories. OECD.

IPCC (2006). 2006 IPCC Guidelines for National Greenhouse Gas Inventories.

Klokk, S.N. (1995). 'Measures for Reducing NO_x Emissions from Ships'. Marintek. Workshop on control technology for emissions from off-road vehicles and machines, ships and aircrafts, Oslo, 8–9 June 1995.

Kuwahara, T., Yoshida, K., Hanamoto, K., Sato, K., Kuroki, T., Yamamoto, T., & Okubo, M. (2012). Pilot-scale experiments of continuous regeneration of ceramic diesel particulate filter in marine diesel

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing

engine using nonthermal plasma-induced radicals. *IEEE Transactions on Industry Applications*, 48(5), 1649-1656.

Lloyd's Register (1993). 'Marine Exhaust Emissions Research Programme: Phase II Transient Emission Trials'. Lloyd's Register Engineering Services, London.

Lloyd's Register (1995). 'Marine Exhaust Emissions Research Programme'. Lloyd's Register Engineering Services, London.

Marintek (1990). 'Exhaust gas emissions from international marine transport'. Norwegian Maritime Technology Research Institute, Trondheim, 1990.

MEET (1998). Spencer C. Sorensen (ed). 'Future Non-Road Emissions'. MEET deliverable No 25. The European Commission.

Scipper (2021). Scipper project Deliverable D4.1 'New set of emission factors and activity information'.

Stubberud, G. (1995). 'Proposed international requirements for reduction of emissions from ships'. From the Workshop on Control Technology for Emissions from Off-Road Vehicles and Machines, Ships and Aircraft, Oslo, June 8–9 1995.

Thomas Reed Publications, Reed's Marine Distance Tables. Seventh edition, Thomas Reed Publications Limited. Surrey, 1992.

Tran T. A. (2017). Research of the scrubber systems to clean marine diesel engine exhaust gases on ships. *Journal of Marine Science: Research & Development*, 7(6), 243, 10.4172/2155-9910.1000243

Trozzi C., Vaccaro R. (1998). 'Methodologies for estimating air pollutant emissions from ships', In: MEET, Methodologies for calculating Emissions and Energy consumption from Transport, European Commission, Transport Research Fourth Framework Programme Strategic Research DG VII, 1998.

Trozzi C., Vaccaro R. (2006). 'Methodologies for estimating air pollutant emissions from ships: a 2006 update', *Environment & Transport*, 2nd International Scientific Symposium including 15th conference Transport and Air Pollution, Reims, France : 12–14 June 2006

Trozzi C. (2010). 'Update of Emission Estimate Methodology for Maritime Navigation', Techne Consulting report ETC.EF.10 DD, May 2010.

U.S. Environmental Protection Agency, 'Current Methodologies in Preparing Mobile Source Port-Related Emission Inventories', Final Report Prepared for U.S. Environmental Protection Agency by ICF International, April 2009

Winther, M., and Nielsen O. 2006. 'Fuel use and emissions from non road machinery in Denmark from 1985–2004 — and projections from 2005–2030'. Environmental Project 1092. The Danish Environmental Protection Agency, pp. 238, (https://www2.mst.dk/Udgiv/publications/2006/87-7052-085-2/html/default_eng.htm), accessed 19 July 2019.

Winther, M. 2008a. Fuel consumption and emissions from navigation in Denmark from 1990–2005 — and projections from 2006–2030. Technical report from NERI No 650, pp. 109, (<https://www2.dmu.dk/Pub/FR650.pdf>), accessed 19 July 2019

Winther 2008b. 'New national emission inventory for navigation in Denmark', Atmospheric Environment, Volume 42, Issue 19, June 2008, pp. 4632–4655

6. Point of enquiry

Enquiries concerning this chapter should be directed to the relevant leader(s) of the Task Force on Emission Inventories and Projection's expert panel on Transport. Please refer to the TFEIP website (www.tfeip-secretariat.org/) for the contact details of the current expert panel leaders.

Appendix A: Black carbon (BC) fractions of PM emissions from navigation

In order to maintain consistency throughout the guidebook, it should be noted that the literature emission factor values used here directly represent elemental carbon (EC), and these values are assumed to be equal to BC.

Elemental carbon (EC) is formally defined as a “substance containing only carbon, carbon that is not bound to other elements, but which may be present in one or more of multiple allotropic forms”. Examples of elemental carbon are diamond, carbon nanotubes, graphite or fullerenes. Many analytical methods quantify the gases and concentration of atmospheric soot particles and depending on the method used, the non-organic carbon fraction of soot is labeled BC or elemental carbon (EC). Unlike organic carbon (OC), which is emitted from primary sources and is formed from chemical reactions in the atmosphere (secondary OC), BC/EC are only emitted directly into the atmosphere. The EC determination is based on first removing volatile and semi-volatile species in an inert atmosphere by temperature increase, and then oxidizing the remaining sample to determine EC by the CO₂ produced during combustion.

Black carbon (BC) is carbon that is black. The formation process is excluded from this definition because of the variety of potential processes. While BC is mostly formed in incomplete combustion, it can be a product of pyrolysis of carbonaceous matter, i.e. the change of the chemical structure of carbonaceous compounds from loss of hydrogen and/or oxygen atoms at temperatures above approx. 250 °C, of dehydration of sugar, or of heating of wood under an oxygen-free atmosphere.

Two properties related to light absorption and heat resistance were considered to be particularly useful for measurement purposes:

- BC strongly absorbs visible light with a mass absorption coefficient (MAC) value above 5 m²/g at a wavelength $\lambda = 550$ nanometers (nm) for freshly produced particles
- BC is refractory, with a volatilization temperature near 4000 K.

Method analysis for determination of EC and BC is one major difference. When its light-absorbing properties are measured, soot is often referred to as equivalent BC (eBC). When its concentration is measured by thermal or thermal/optical techniques; however, it is generally referred to as EC. The EPA report notes that BC and EC values from these measurement methods are highly correlated, although “the method-defined values may differ by as much as a factor of two (EPA, 2012)”.

Another proof that BC and EC are highly correlated, is the dependance of EC/BC from ash content of the fuel. Ash contains metals that act as catalytic reactors on the carbon that are attached. In addition, light absorbing technics are used for measurement these species scatter light, however when thermal methods used with increasing temperature, no CO₂ production occurs. Hence, it would be expected that with the increase of ash, more BC would be produced. As estimated from the literature findings, no correlation between BC and EC exists in relation with ash content.

The conclusion of the present analysis, regarding EC and BC, is that they are highly correlated, and they will be assumed as equivalent. Their determination is crucial depending on the measurement method and technic and is prone to errors.

The emission factors for BC are derived from the analysis described in Scipper D4.1 (Scipper 2021), for diesel fuels and LNG. In addition, for diesel fuelled boats, emissions of BC are presented as BC fractions of PM emissions (f-BC), f-BC = 0.55, which are taken from road transport conventional car engines available from the COPERT model. The same methodology is applied for gasoline fuelled boats, f-BC = 0.05, which are taken from Winther and Nielsen (2011) based on information from Kupiainen and Klimont (2004). Table A1 lists the tables in the guidebook for gasoline and diesel fuelled boats which contain f-BC fraction information.

Table A1 Guidebook tables which contain f-BC fraction data

Table no.	Tier	Detail	BC:PM data source
3-4	1	Gasoline (boats)	Winther et al. (2011); f-BC = 0.05
3-8	2	Boats (D/G2/G4) x Fuel type	Winther et al. (2011); diesel: 0.55, gasoline: 0.05
3-16	3	Boats (D/G2/G4) x Vessel type x Fuel type	Winther et al. (2011); diesel: 0.55, gasoline: 0.05

Acknowledgment

Andreas Petzold, DLR is thanked for technical discussions during the project.

References

Scipper (2021). Scipper project Deliverable D4.1 'New set of emission factors and activity information'.

Winther, M.; Nielsen, O.-K.: Technology dependent BC and OC emissions for Denmark, Greenland and the Faroe Islands calculated for the time period 1990-2030. *Atmospheric Environment* 45 (2011), s. 5880-5895.

Appendix B: Default fuels and their properties

Fuels play a significant role in the worldwide maritime. In recent years, fuels have been focused by the regulatory bodies due to their properties and their consequences to various emissions. The most recent regulation that has been adopted in the worldwide maritime by the IMO, is the 2020 Sulphur cap, with effective date from 1st of January 2020. This limits the fuel sulphur content of the fuel to 0.5%, independently of the region sailing. This followed the establishment of emission control areas (ECAs) where FSC has already been limited to 0.1%. The introduction of this regulation has a direct effect on lowering the emissions of SO_x and indirectly the Particulate Matter. Additionally, except sulphur content of the fuel, carbon content plays significant role, due to the direct effect on CO₂ emissions. Furthermore, lower calorific value of the fuel is also an important element, because refers

to the energy density of the fuel and hence its capability to produce the necessary energy for vessel requirements. All these properties and many more can be evaluated by performing a chemical analysis on the fuel, which stands as a standard procedure during bunkering of a ship (Scipper 2021). The most critical fuel properties, that have a direct effect on emissions, have been collected from the literature review performed and presented on Table B1. Sulphur, ash and carbon content and lower calorific heating value have been collected from studies when available in relation with the fuel. These fuel properties have been used widely during the estimation of emission factors of various pollutants. The most representative example for the use of default fuel properties is estimation of SO₂ and sulphates emissions. Emissions of these pollutants are directly dependent on the fuel sulphur content (FSC). The FSC for each fuel type that was used for the estimation of SO₂ and sulphates is according to Table B1.

Table B1 Overview of default fuels and their properties

Fuel type	Sulphur Content (%)	Ash Content (%)	Carbon Content (%)	LHV (MJ/kgfuel)
Bunker Fuel Oil	1.42	0.0383	86.8	41.5
MDO/MGO	0.0931	0.00634	86.5	43.4
LNG	0.00	0.00	75.3	49.8

Source: Scipper (2021)

Appendix C: Calculation methodology for PM

Particulate matter (PM) emitted from ships consists of a number of components, including carbonaceous substances, inorganic salts (such as sulfate and nitrate salts), organic compounds, and metals, that can greatly impact visibility. PM also participates strongly in climate forcing through both direct and indirect effects. Particulate matter emissions from ocean-going vessels could cause approximately 60000 deaths annually from cardiopulmonary disease and lung cancer. Although it is proved that PM emissions have air quality, climate change and human health impacts, PM emissions are not regulated. The new 2020 Sulphur Cap limit primarily established to abate SO_x emissions and indirectly reduce PM, due to their dependance on FSC. The emission factors of PM were higher at combustion of HFO qualities than the MDO/MGO (Scipper 2021).

PM Emission Factor is calculated by the sum of its component, as presented below:

$$EF_{PM} = EF_{OM} + EF_{SO_4+6.5H_2O} + EF_{Ash} + EF_{BC}$$

PM, when utilizing natural gas, was mostly composed of organic compounds and a small amount of black carbon was found. With the natural gas use a higher fraction of MGO pilot fuel was utilized at lower loads which could end up producing higher PM emissions compared to higher loads. The particle emissions results of PM showed significantly lower levels when utilizing natural gas as the main fuel compared to diesel fuels (Scipper 2021).

1.A.3.d.i, 1.A.3.d.ii, 1.A.4.c.iii

International maritime and inland navigation, national navigation,
national fishing, recreational boats International maritime
navigation, international inland navigation, national navigation
(shipping), national fishing
