



Delivery Report Austria

EEA-FTSP-Sealing_CountryDeliveryReport-AT

Issue 1.0

Date Issued: 20.11.2007

European Environment Agency



Service Contract No. 3601/B2007.EEA.52942

Prepared by:

Jürgen Weichselbaum, GeoVille GmbH

Dr. Hanjo Kahabka, Infoterra GmbH



gisat




an EADS Astrium company



INGÅR I LANTMÄTERIET



Document Release Sheet

Author:	Jürgen Weichselbaum, GeoVille GmbH	Sign 	Date 2007/11/08
Production Manager:	Dr. Hanjo Kahabka, Infoterra GmbH	Sign	Date
Project Manager:	Marek Tinz, Infoterra GmbH	Sign	Date
Approval:	Ana Sousa, EEA	Sign	Date
Distribution:	European Environment Agency		

Change Record

Issue/Rev	Date	Page(s)	Description of Change	Release
	20.11.07	21	Release of issue 1	F1v0

Printed on XEROX® Business paper produced using processes conforming to ISO 14001 or EMAS Environmental Management Systems – Elemental 100% chlorine free bleached

CONTENT

1	INTRODUCTION.....	4
1.1	Purpose and Scope	4
1.2	Applicable Documents	4
1.3	Reference Documents	4
2	DATA SPECIFICATIONS.....	5
2.1	Technical Product Specification.....	5
2.2	Algorithms used	7
2.3	Format description	9
2.4	Metadata	9
3	SUMMARY OF PRODUCTION	10
3.1	Timetable, production milestones	10
3.2	Technical problems encountered, mitigation measures	10
4	ACCURACY ASSESSMENT REPORT	11
4.1	Description of approach	11
4.2	Sample placement (stratification, number & locations of sample sites)	12
4.3	Final result	13
5	DETAILED LIST OF PROVIDED DATA.....	14
	ANNEX 1: INTERPRETATION GUIDELINE FOR VISUAL CORRECTION	15
	ANNEX 2: LIST OF WORKING UNITS AND EO DATA USED.....	17
	ANNEX 3: SAMPLE PLOT VALIDATION SHEET	19

1 INTRODUCTION

1.1 PURPOSE AND SCOPE

This document presents the country delivery report of EEA's Fast Track Service Precursor Sealing Product of Austria.

According to the Tender Specifications, this report corresponds to deliverable 5 (38 Country delivery reports).

1.2 APPLICABLE DOCUMENTS

ITD-0490-PRO-0006	Proposal responding to EEA's Invitation for Tender, Technical Offer including Management Part –Issue 1

1.3 REFERENCE DOCUMENTS

EEA/IDS/07/001	Tender Specifications "GMES Fast Track Service on Land Monitoring", EEA, 2006
ISO9001	ISO 9001: 2000 Standard
ITD-QMS-POL-0001_Infoterra_Quality_Policy	Quality Policy Statement
QMS-ITD-MA-0011_QMSManual_I3.1	Quality Management System (QMS) Manual
ITD-UMS-POL-0001_Infoterra_Environmental_Policy	Declaration of Enterprise Environmental Policy
ITD-QMS-STD-0001-ControlOfDocumentation	Control of Documentation and Data
QMS-ITD-ST-0001_CSM	Customer Satisfaction Measurement
QMS-ITD-PR-0003_PM_ProductDevelopment_I4	Project Management, Product (Prototype) Development and Production

2 DATA SPECIFICATIONS

2.1 TECHNICAL PRODUCT SPECIFICATION

Content
<i>Raster dataset of built-up and non built-up areas including continuous degree of soil sealing ranging from 0 - 100% in full spatial resolution (20 x 20 m) with the associated metadata.</i>
Geographic coverage
<i>Country of Austria (AT)</i>
<i>Coverage [km²]: 83.870 km² (plus additional buffer of 200 meters outside of country border)</i>
Input data sources
<p><u>Input data provided by ESA:</u></p> <ul style="list-style-type: none"> ▪ <i>Orthorectified satellite data coverage for Europe (Image2006), acquired primarily in the reference year 2006 (+/- 1 year), covering two dates, used sensors SPOT 4 and 5 (HRVIR) and IRS-P6 LISS-III:</i> <ul style="list-style-type: none"> • <i>20 m resampled (with cubic convolution interpolation)</i> • <i>4 spectral bands</i> • <i>Max. 5% cloud coverage</i> • <i>Covering 2 dates, at least 6 weeks apart from the respect. scene selected for the first coverage</i> • <i>Orthorectified towards national projection systems (used DTM unknown)</i> • <i>Delivery on a country by country basis foreseen</i> • <i>Metadata to each scene</i> <p><u>Input data provided by EEA</u></p> <ul style="list-style-type: none"> ▪ <i>Dataset with national country borders (to be used for clipping the data at a national level) as defined and provided by the EEA</i> <p><u>Ancillary input data</u></p> <ul style="list-style-type: none"> ▪ <i>National Corine Land Cover 2000 data in vector format to be used for the stratification of the QA sample plots</i>
Methodology
<i>Supervised classification of built-up areas with following visual improvement of classification result and derivation of degree of soil sealing based on calibrated NDVI</i>
Geometric resolution
<i>Pixel resolution 20 x 20 m</i>

Coordinate Reference System
<i>Lambert_Conformal_Conic</i> <i>False_Easting: 400000,000000</i> <i>False_Northing: 400000,000000</i> <i>Central_Meridian: 13,333333</i> <i>Standard_Parallel_1: 46,000000</i> <i>Standard_Parallel_2: 49,000000</i> <i>Scale_Factor: 1,000000</i> <i>Latitude_Of_Origin: 47,500000</i> <i>Datum: D_Bessel_1841</i>
Geometric accuracy (positioning scale)
<i>According to orthorectified satellite image base delivered by ESA</i>
Thematic accuracy (in %)
<i>Classification accuracy per hectare (based on 100 x 100 m grid) of built-up non built-up areas is > 85% (assessed according approach as described in chapter 4.1)</i>
Accuracy assessment approach
<i>Accuracy assessment based on random sample plots</i>
Delivery format
<i>IMAGINE Image (IMG)</i>
Data type
<i>Raster</i>
Raster coding
<i>Thematic pixel values</i> <i>0 – Non-built up areas, water bodies inland</i> <i>1-100 - sealing values for built-up areas</i> <i>254 – Unclassifiable areas (clouds, shadows, etc.)</i> <i>255 – No Data (No thematic information)</i>
Metadata
<i>According to EEA metadata standards (EEA MSGI specification)</i>
Ancillary Data – Mitigation shape file
<i>Metadata set per delivered country in vector format defining all areas which deviate from the ITT's EO data specifications (i.e. clouds, acquisition date). The vector layer is derived from image footprints and cloud cover information of Image2006 within the country border.</i> <i>The attribute table contains information about WU identification and possible deviations from the standard</i>

specifications of Image2006:

- *[Cntr]* Country Code;
- *[SCU]* Number of Sub-Country unit containing the Working Unit;
- *[WU_ID]* Full name of the Working Unit;
- *[No_acqu]* Number of acquisitions within the WU; 0 = gap / no image available;
- *[Out_Veg]* No of acquisition dates outside of country-specific vegetation period;
- *[Below_6w]* Acquisition dates less than 6 weeks apart;
- *[Cloud_cov]* Thematic value indicating the cloud coverage: No clouds = 1; Clouds present in coverage 1 = 2; Clouds present in Coverage 2 = 3; Clouds present in both coverages = 4

2.2 ALGORITHMS USED

The aim of the image processing is to derive in a robust, reliable and reproducible way based on satellite images (Spot 4/5, IRS LISS) a raster dataset of built-up and non built-up areas including continuous degree of soil sealing ranging from 0 - 100% in full spatial resolution (20 x 20 m).

As the main challenge, the derivation of a continuous degree of soil sealing has to be solved. The proposed image processing approach is based on the fact that a reliable derivation of soil sealing degrees is not possible directly from the vegetation index. Low vegetation index values, which are characteristic for densely built-up areas are e.g. also found in bare soil areas of agricultural fields. Even when using multi-temporal satellite images with different acquisition dates in combination with bi-temporal, multi-spectral classification techniques the result may be improved, but the vegetation indices of two acquisitions are still too ambiguous.

Therefore, the proposed image processing approach will start with deriving a binary map of built-up areas and then further subdivide this area into 100 degrees of soil sealing, ranging from totally sealed surfaces (100% degree of soil sealing) up to built-up areas with extensive vegetation cover (1% degree of soil sealing). This allows the final user to aggregate the continuous values as required.

To be viable for this objective the classification methodology has to fulfil the following general criteria:

- Allow for local calibration of parameters used per working sub-area (as defined by satellite images) to overcome diversity of different regions in Europe and image immanent characteristics (such compensating for different settlement structures, ecozones, phonological and weather conditions).
- Deliver the required accuracy
- Maximise consistency and objectivity of the results all over Europe
- Maximise cost-efficiency under given constraints

- Maximise standardisation of production and working motivation of the analysts
- Secure realisation in due time.

Based on these criteria, the proposed methodological approach consists of the following main steps:

- a) Data preparation & management: Provision of spatial database of bi-temporal satellite images and derived working sub-areas ("Working Units" = WU) to be processed in the following steps
- b) Core processing, containing the 3 main processing steps:
 - (1) Hybrid automated classification with supervised and unsupervised elements, leading to binary maps of built-up area
 - (2) Manual correction of the binary built-up map to obtain the required quantitative thematic accuracy (85%) as well as good qualitative results
 - (3) Derivation of degree of soil sealing based on the NDVI (Normalised Difference Vegetation Index)
- c) Generation of sub-country / country data sets
- d) Accuracy assessment
- e) Re-projection & mosaicing, generation of seamless European dataset.

2.3 FORMAT DESCRIPTION

Delivery format
<i>ERDAS IMAGINE Image (IMG)</i> <i>Data Type: unsigned 8-bit</i> <i>Compression: Run-length encoding (ESRI)</i> <i>Number of bands: 1</i> <i>Pixel size: 20 m</i>
Data type
<i>Thematic Raster</i>
Metadata
<i>According to EEA metadata standards (EEA MSGI specification)</i>

2.4 METADATA

See European Environment Agency – Metadata Standard for Geographic Information (EEA-MSGI), Version 1.1a (18 August 2004).

The metadata is provided as XML-file and as PDF-document according to EEA Metadata Standard for Geographic Information (EEA-MSGI).

3 SUMMARY OF PRODUCTION

3.1 TIMETABLE, PRODUCTION MILESTONES

Delivery by ESA	Data Reception	Data Preparation		Received by SP	Production	
		Start	End		Start	End
13.07.2007	19.07.2007	20.07.2007	21.08.2007	26.08.2007	27.08.2007	19.10.2007

3.2 TECHNICAL PROBLEMS ENCOUNTERED, MITIGATION MEASURES

The technical discussion between the service providers and EEA of how to handle IMAGE2006 data which is not according to the ITT's specification (e.g. concerning cloud cover, acquisition dates), was ongoing during the entire production process of the soil sealing product for Austria.

It was decided to produce for each country a GIS metadata file indicating all areas not corresponding to the ITT's specifications, incl. a country-wide cloud mask differentiating between multi- and monotemporal cloud areas.

The analysis of the GIS metadata file w.r.t. to the ITT's specifications yielded the following results for Austria (total area: 84.380 km² incl. 200m buffer area on country borders):

- Number of acquisitions: 2 for all working units, i.e. no gaps in image coverage
- Country area outside of vegetation period April-October: 27.025 km² (32,0%)
- Country area with acquisition dates less than 6 weeks apart: 9.011 km² (10,7%)
- Cloud coverage:
 - o No clouds in both coverages: 67.632 km² (80,1%); multitemporal classified was applied to both coverages
 - o Clouds in both coverages: 1.004 km² (1,2%); classified as "254 - unclassifiable areas"
 - o Clouds only in coverage 1: 6.115 km² (7,3%); monotemporal classification was applied based on coverage 2;
 - o Clouds only in coverage 2: 9.629 km² (11,4%); monotemporal classification was applied based on coverage 1;

The final decision on the methodology for mitigating (monotemporal) cloud coverage came after the first finalization of the raster product. Production was then re-applied to classify areas affected by monotemporal cloud areas based on the other cloud-free coverage.

4 ACCURACY ASSESSMENT REPORT

4.1 DESCRIPTION OF APPROACH

The derivation of accuracy measures as agreed with EEA includes the following steps:

1. Definition of 100 x 100 m reference grid in national projection of the respective country assessed
2. Stratification of the area based on Corine Land Cover level I. To emphasize the accuracy assessment in the urban areas, 50 % of the sample plots are placed within CLC class Artificial Surfaces, the other 50 % are placed in the remaining classes.
3. Cluster based random sampling based on 100 x 100 m reference grid, defined per single nation, number of samples adapted to nation size in km²
4. Re-projection of reference samples to allow overlay with Google Earth
5. Estimation, if reference cell will be labelled as "built-up" according to EEA definition or not (80% threshold degree of soil sealing) taking into account the visibility of objects in the satellite images used for the production of the raster product (technically possible also when using Google Earth¹)
6. Estimation of overall accuracy to generate accuracy measure (overall accuracy, user accuracy, (commission error), producer accuracy (omission error), per single nation (for internal use & validation only) and for European dataset for publication by EEA.
7. Adaptation of statistics with regard to the mitigation shape file. All sample plots falling within areas of the raster product, where the underlying IMAGE2006 data has been identified to fail the ITT's specifications, are not included in the final statistics. This includes areas where
 - Less than two coverages of EO data are available
 - One or more acquisition dates are outside the defined acquisition window
 - The acquisition dates of the two coverages used are less than six weeks apart
 - Cloud cover is present in one or more coverage


The built-up raster product which is subject to the accuracy assessment is accepted as according to the specifications if the final statistics indicate an overall accuracy of more than 85 %.

Accuracy assessment is performed per country product for internal quality control. For final acceptance by EEA, the overall accuracy of the European product is arbitrated.

¹ using web-based information input to a local server

4.2 SAMPLE PLACEMENT (STRATIFICATION, NUMBER & LOCATIONS OF SAMPLE SITES)

Overall number of sample plots : 119 (60 within CLC2000 Artificial Surfaces). The figure below shows the placement of sample plots (black dots) within CLC urban areas (red areas) and outside.

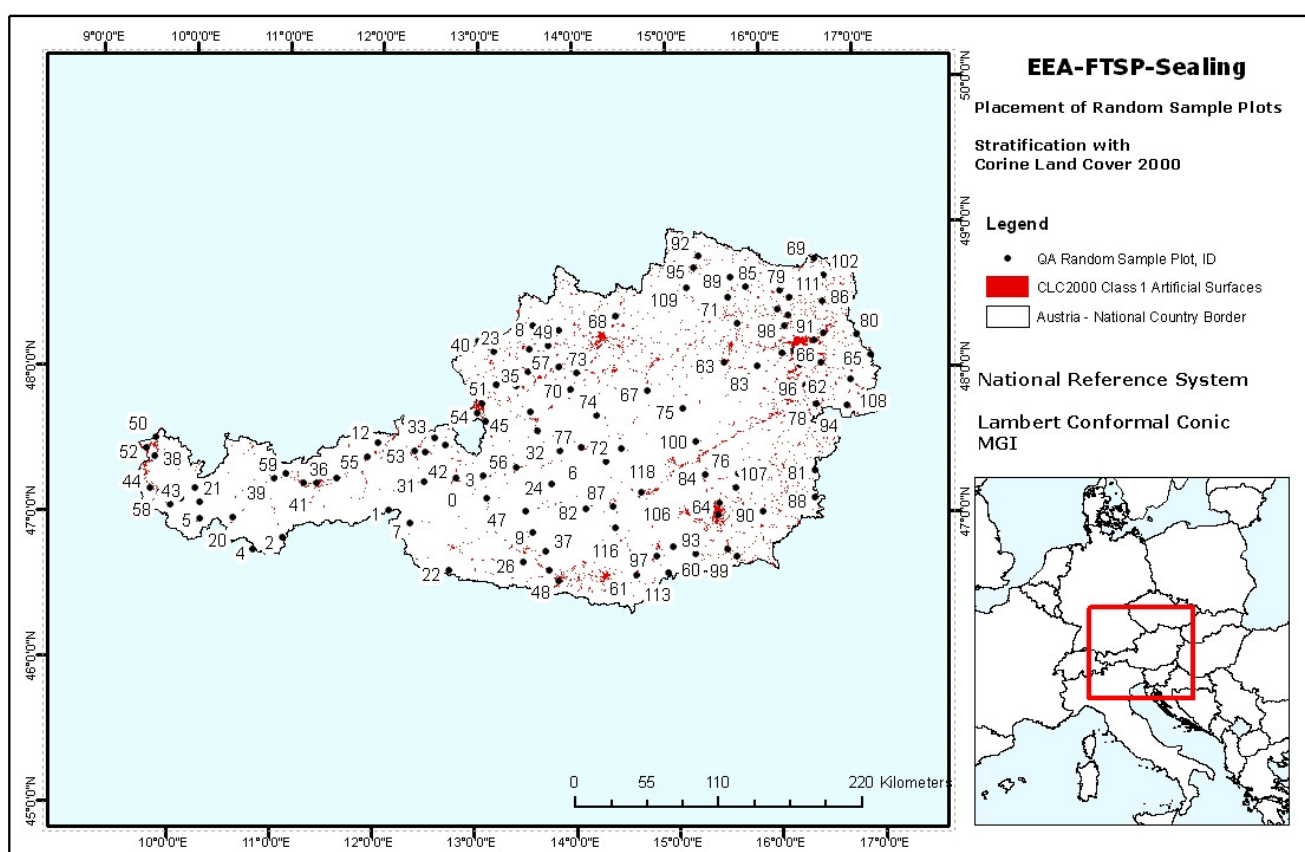

4.3 FINAL RESULT

The final accuracy assessment for the country product surpassed the threshold of an overall accuracy of 85 %.

Classification				Producer's Accuracy	Omission Error	
Validation		>80%	<80%	Σ		
	>80%	1	1	2	50,0%	50,0%
	<80%	1	116	117	99,1%	0,9%
	Σ	2	117	119		
	User's Accuracy	50,0%	99,1%			
	Commission Error	50,0%	0,9%			
Overall Accuracy	98,3%					

(see Annex 3 for detailed sample plot results)

5 DETAILED LIST OF PROVIDED DATA

- Raster dataset of built-up and non built-up areas including degree of soil sealing, 2006, in full spatial resolution (20 m x 20 m).
- ArcMap Legend File for raster data set for plotting a degree of soil sealing, aggregated to thematic classes
- ArcMap Legend File for raster data set for plotting a degree of soil sealing in a range from 1-100 %
- Mitigation shape file; metadata set per delivered country defining all areas which deviate from the ITT's EO data specifications.
- XML-Metadata of raster and vector data after EEA specifications
- EEA Metadata Stylesheet
- Report per Country with description of raster and vector data, country specific production & mitigation issues (the document at hand)
- Product inspection sheet for outgoing deliveries, ensuring product conformity of raster dataset
- National country borders in national projection

ANNEX 1: INTERPRETATION GUIDELINE FOR VISUAL CORRECTION

Objective

To produce a pixel-based high-resolution layer of built-up areas including degree of soil sealing for the EEA member states of homogeneous look & feel with an overall thematic accuracy of 85%.

Definition of Built-up Areas

Built-up areas according to the consortium definition are represented by a degree of soil sealing between 1 and 100%.

Built-up area therefore comprises pixels that are fully or partly covered by houses, roads, mines and quarries and any other facilities, including their auxiliary spaces, deliberately installed for the pursuit of human activities. Built-up area does not include any fully vegetated pixels, even if they are closely related to these activities (such as city parks and gardens), or any other unvegetated non-built-up open spaces covered with bare soil, sand, glacier, bare rocks or water.

(modified according to http://glossary.eea.europa.eu/EEAGlossary/B/built_up_land)


The FTS in Relation to Corine Land Cover

The FTS high resolution core land cover data is a complementary element of the GMES Fast Track Services. The data set will be a land cover product, reflecting actual ground cover on a pixel by pixel level rather than functional properties.

CLC level 1 class 'artificial surfaces' contains artificial surfaces and functionally related vegetated areas, reflecting the land use aspect. Therefore a significant part of this CLC level 1 class contains vegetated areas composed of fully vegetated pixels. However, in the FTS product only pixels that contain some built-up/sealed area will be included.

In addition, built-up pixels within all other CLC level 1 classes (which are not mapped in CLC according to the 25ha MMU) will be included according to the above definition. Fully vegetated or unvegetated non-built-up pixels will be excluded.


CLC 2000 - level 1 class "artificial surfaces"

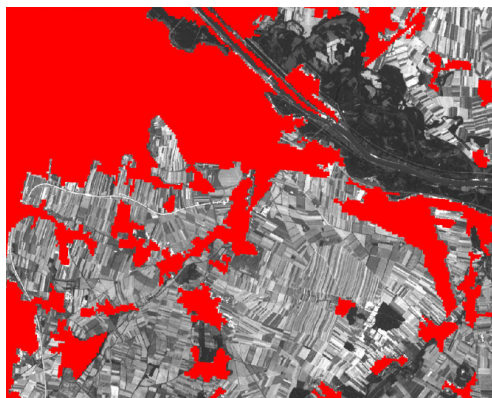

SPOT-4 satellite image over Vienna / Austria
(green band; 20m resolution)



FTS high-resolution layer of built-up areas
(20m resolution)

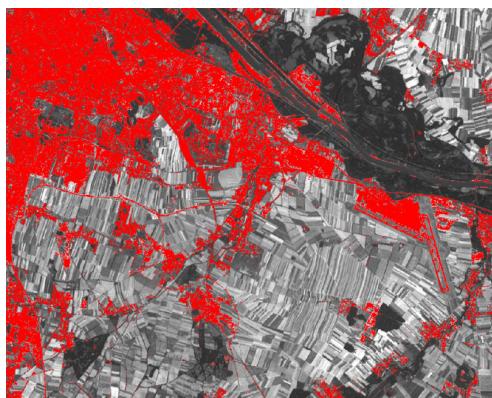

Special Considerations

- The same definition of built-up areas shall apply for production and quality control.
- To ensure homogeneity across the whole of Europe, partially captured linear features outside of urban agglomerations (e.g. fragments of roads or railway lines) will not be completed by the manual post editing.
- Mines and quarries will be considered built-up areas according to the above definition.
- It is proposed to include a no-data class for unclassifiable areas (e.g., clouds) which is to be marked and identified during the process of manual interpretation.

ANNEX 2: LIST OF WORKING UNITS AND EO DATA USED

The following list provides information about the two coverages of EO data which were used to create the working units. The file name is identical to the WU identification within the mitigation shapefile's attribute table and contains the specifications of sensors, paths/rows and capture dates.

The full file name is explained in the following:

[Sensor Coverage 1]_[TrackFrame Coverage 1]_[Capture Date YY/MM/DD Coverage 1]_[Instrument Coverage 1]_[Sensor Coverage 2]_[TrackFrame Coverage 2]_[Capture Date YY/MM/DD Coverage 2]_[Instrument Coverage 2]

Table 1: List of Working Units used for the production of Austria

Zone	Working Unit
1	spot4_066252_070414_2i8_spot4_066253_060817_2i0
1	spot4_057255_060717_1i0_irsp6_027035_060907_l30
1	spot4_057254_060717_1i0_irsp6_027035_060907_l30
1	spot4_056255_060615_1i0_irsp6_026035_050907_l30
1	spot4_056254_060615_1i0_irsp6_026035_050907_l30
1	irsp6_033034_050801_l30_spot4_071253_060717_1i4
1	irsp6_032036_050422_l30_irsp6_032036_060722_l30
1	irsp6_032035_050422_l30_irsp6_032035_060722_l30
1	irsp6_032034_050422_l30_spot5_068251_060706_1j5
1	irsp6_032034_050422_l30_spot4_069252_060723_2i3
1	irsp6_032034_050422_l30_irsp6_033034_050801_l30
1	irsp6_031035_070407_l30_irsp6_031036_060717_l30
1	irsp6_031035_070314_l30_spot4_066253_060817_2i0
1	irsp6_031035_070314_l30_irsp6_032035_050422_l30
1	irsp6_031035_060717_l30_irsp6_031035_070314_l30
1	irsp6_031034_060506_l30_spot5_066252_060911_1j0
1	irsp6_031034_060506_l30_spot4_066252_060817_2i0
1	irsp6_031034_060506_l30_spot4_066251_060817_2i0
1	irsp6_031034_060506_l30_irsp6_032035_050422_l30
1	irsp6_031034_060506_l30_irsp6_032034_050422_l30
1	irsp6_030036_060618_l30_irsp6_030036_061016_l30
1	irsp6_030035_050623_l30_irsp6_030035_061016_l30
1	irsp6_030034_060501_l30_spot4_066252_070414_2i8
1	irsp6_030034_050623_l30_irsp6_030034_060501_l30
1	irsp6_029036_051109_l30_irsp6_029036_060613_l30
1	irsp6_029035_051109_l30_irsp6_029035_060613_l30
1	irsp6_029034_050922_l30_irsp6_029034_060613_l30

1	irsp6_028035_060702_l30_irsp6_028035_060912_l30
1	irsp6_027035_060907_l30_irsp6_028035_060702_l30
1	irsp6_026035_050907_l30_irsp6_027035_060907_l30

ANNEX 3: SAMPLE PLOT VALIDATION SHEET

Sample Plot 100 x100 m [ID]	FTSP Degrees of Soil Sealing [Mean Value]	FTSP Built up [TRUE / FALSE]	Reference Built up [TRUE / FALSE]	Compliance	Excluded by Mitigation Shape [TRUE / FALSE]
0	0,0	FALSE	FALSE	TRUE	TRUE
1	0,0	FALSE	FALSE	TRUE	TRUE
2	0,0	FALSE	FALSE	TRUE	FALSE
3	3,3	FALSE	FALSE	TRUE	FALSE
4	0,0	FALSE	FALSE	TRUE	TRUE
5	0,0	FALSE	FALSE	TRUE	TRUE
6	0,0	FALSE	FALSE	TRUE	FALSE
7	0,0	FALSE	FALSE	TRUE	TRUE
8	0,0	FALSE	FALSE	TRUE	FALSE
9	0,0	FALSE	FALSE	TRUE	FALSE
10	0,0	FALSE	FALSE	TRUE	TRUE
11	0,0	FALSE	FALSE	TRUE	FALSE
12	0,0	FALSE	FALSE	TRUE	TRUE
13	0,0	FALSE	FALSE	TRUE	FALSE
14	0,0	FALSE	FALSE	TRUE	FALSE
15	0,0	FALSE	FALSE	TRUE	FALSE
16	0,0	FALSE	FALSE	TRUE	FALSE
17	0,0	FALSE	FALSE	TRUE	TRUE
18	0,0	FALSE	FALSE	TRUE	FALSE
19	0,0	FALSE	FALSE	TRUE	TRUE
20	0,0	FALSE	FALSE	TRUE	TRUE
21	0,0	FALSE	FALSE	TRUE	TRUE
22	0,0	FALSE	FALSE	TRUE	TRUE
23	0,0	FALSE	FALSE	TRUE	FALSE
24	0,0	FALSE	FALSE	TRUE	FALSE
25	0,0	FALSE	FALSE	TRUE	TRUE
26	0,0	FALSE	FALSE	TRUE	FALSE
27	0,8	FALSE	FALSE	TRUE	TRUE
28	12,0	FALSE	FALSE	TRUE	FALSE
29	19,0	FALSE	FALSE	TRUE	FALSE
30	36,7	FALSE	FALSE	TRUE	FALSE
31	20,8	FALSE	FALSE	TRUE	TRUE
32	14,9	FALSE	FALSE	TRUE	FALSE
33	42,2	FALSE	FALSE	TRUE	TRUE
34	30,0	FALSE	FALSE	TRUE	FALSE
35	2,3	FALSE	FALSE	TRUE	FALSE
36	56,0	FALSE	FALSE	TRUE	FALSE
37	51,5	FALSE	FALSE	TRUE	FALSE

Sample Plot 100 x100 m [ID]	FTSP Degrees of Soil Sealing [Mean Value]	FTSP Built up [TRUE / FALSE]	Reference Built up [TRUE / FALSE]	Compliance	Excluded by Mitigation Shape [TRUE / FALSE]
38	33,4	FALSE	FALSE	TRUE	TRUE
39	30,2	FALSE	FALSE	TRUE	FALSE
40	0,0	FALSE	FALSE	TRUE	FALSE
41	78,0	FALSE	FALSE	TRUE	FALSE
42	67,5	FALSE	FALSE	TRUE	TRUE
43	10,9	FALSE	FALSE	TRUE	TRUE
44	5,8	FALSE	FALSE	TRUE	TRUE
45	46,7	FALSE	FALSE	TRUE	FALSE
46	9,0	FALSE	FALSE	TRUE	TRUE
47	12,1	FALSE	FALSE	TRUE	FALSE
48	88,9	TRUE	TRUE	TRUE	FALSE
49	10,0	FALSE	FALSE	TRUE	FALSE
50	1,0	FALSE	FALSE	TRUE	TRUE
51	0,0	FALSE	FALSE	TRUE	TRUE
52	29,8	FALSE	FALSE	TRUE	FALSE
53	74,8	FALSE	TRUE	FALSE	TRUE
54	17,2	FALSE	FALSE	TRUE	TRUE
55	31,9	FALSE	FALSE	TRUE	TRUE
56	67,9	FALSE	FALSE	TRUE	FALSE
57	0,6	FALSE	FALSE	TRUE	FALSE
58	1,6	FALSE	FALSE	TRUE	TRUE
59	27,7	FALSE	FALSE	TRUE	FALSE
60	0,0	FALSE	FALSE	TRUE	TRUE
61	0,0	FALSE	FALSE	TRUE	FALSE
62	0,0	FALSE	FALSE	TRUE	FALSE
63	4,8	FALSE	FALSE	TRUE	TRUE
64	0,0	FALSE	FALSE	TRUE	TRUE
65	0,0	FALSE	FALSE	TRUE	FALSE
66	0,0	FALSE	FALSE	TRUE	FALSE
67	0,0	FALSE	FALSE	TRUE	TRUE
68	0,0	FALSE	FALSE	TRUE	FALSE
69	0,0	FALSE	FALSE	TRUE	FALSE
70	0,0	FALSE	FALSE	TRUE	FALSE
71	0,0	FALSE	FALSE	TRUE	TRUE
72	0,0	FALSE	FALSE	TRUE	TRUE
73	0,0	FALSE	FALSE	TRUE	FALSE
74	0,0	FALSE	FALSE	TRUE	TRUE
75	0,0	FALSE	FALSE	TRUE	TRUE
76	0,0	FALSE	FALSE	TRUE	TRUE
77	26,7	FALSE	FALSE	TRUE	TRUE

Sample Plot 100 x100 m [ID]	FTSP Degrees of Soil Sealing [Mean Value]	FTSP Built up [TRUE / FALSE]	Reference Built up [TRUE / FALSE]	Compliance	Excluded by Mitigation Shape [TRUE / FALSE]
78	0,0	FALSE	FALSE	TRUE	FALSE
79	0,0	FALSE	FALSE	TRUE	TRUE
80	0,0	FALSE	FALSE	TRUE	FALSE
81	0,0	FALSE	FALSE	TRUE	FALSE
82	0,0	FALSE	FALSE	TRUE	TRUE
83	0,0	FALSE	FALSE	TRUE	FALSE
84	0,0	FALSE	FALSE	TRUE	TRUE
85	0,0	FALSE	FALSE	TRUE	TRUE
86	25,2	FALSE	FALSE	TRUE	FALSE
87	0,0	FALSE	FALSE	TRUE	TRUE
88	0,0	FALSE	FALSE	TRUE	FALSE
89	0,0	FALSE	FALSE	TRUE	TRUE
90	5,5	FALSE	FALSE	TRUE	FALSE
91	38,5	FALSE	FALSE	TRUE	FALSE
92	0,0	FALSE	FALSE	TRUE	FALSE
93	31,3	FALSE	FALSE	TRUE	TRUE
94	69,9	FALSE	FALSE	TRUE	TRUE
95	14,8	FALSE	FALSE	TRUE	FALSE
96	83,9	TRUE	FALSE	FALSE	FALSE
97	59,1	FALSE	FALSE	TRUE	FALSE
98	0,0	FALSE	FALSE	TRUE	TRUE
99	7,3	FALSE	FALSE	TRUE	FALSE
100	37,5	FALSE	FALSE	TRUE	TRUE
102	32,4	FALSE	FALSE	TRUE	FALSE
103	58,6	FALSE	FALSE	TRUE	TRUE
104	24,0	FALSE	FALSE	TRUE	TRUE
105	39,5	FALSE	FALSE	TRUE	TRUE
106	15,1	FALSE	FALSE	TRUE	TRUE
107	58,4	FALSE	FALSE	TRUE	TRUE
108	58,4	FALSE	FALSE	TRUE	FALSE
109	61,8	FALSE	FALSE	TRUE	TRUE
110	14,6	FALSE	FALSE	TRUE	TRUE
111	68,6	FALSE	FALSE	TRUE	TRUE
112	31,0	FALSE	FALSE	TRUE	TRUE
113	20,8	FALSE	FALSE	TRUE	FALSE
114	24,5	FALSE	FALSE	TRUE	FALSE
115	30,2	FALSE	FALSE	TRUE	FALSE
116	50,7	FALSE	FALSE	TRUE	TRUE
117	63,6	FALSE	FALSE	TRUE	TRUE
118	37,1	FALSE	FALSE	TRUE	TRUE

Sample Plot 100 x100 m [ID]	FTSP Degrees of Soil Sealing [Mean Value]	FTSP Built up [TRUE / FALSE]	Reference Built up [TRUE / FALSE]	Compliance	Excluded by Mitigation Shape [TRUE / FALSE]
119	14,2	FALSE	FALSE	TRUE	TRUE